


ADVANCE-GRP[GD] Series



SWITCHED INTERLOCKED SOCKET OUTLETS - IP66



Poles	Hz	Volt	Colour		h.	16A	32A	63A	125A
			16A-32A-63A	125A		1xM25(*) □ 1	1xM32(*) □ 1	1xM40(*) □ 1	1xM50(*) □ 1
2P+E	50/60	100-130		-	4	504.1670	504.3270	-	-
	50/60	200-250		-	6	504.1683	504.3283	-	-
	50/60	380-415		-	9	504.1678	504.3278	-	-
	50/60	480-500		-	7	504.16836	504.32836	-	-
	300÷500	50÷500		-	2	504.16832	504.32832	-	-
3P+E	50/60	100-130			4	504.1672	504.3272	504.6372	504.12572
	50/60	200-250			9	504.1674	504.3274	504.6374	504.12574
	50/60	380-415			6	504.1686	504.3286	504.6386	504.12586
	60	440-460			11	504.16865	504.32865	504.63865	504.125865
	50/60	480-500			7	504.16866	504.32866	504.63866	504.125866
	50/60	600-690			5	504.16867	504.32867	504.63867	504.125867
	50/60	380/440			3	504.16864	504.32864	504.63864	504.125864
	100÷300	50÷690			10	504.16861	504.32861	504.63861	504.125861
	>300÷500	50÷690			2	504.16862	504.32862	504.63862	504.125862
	50/60	100-130			4	504.1679	504.3279	504.6379	504.12579
3P+N+E	50/60	208-250			9	504.1675	504.3275	504.6375	504.12575
	50/60	346-415			6	504.1687	504.3287	504.6387	504.12587
	50/60	480-500			7	504.16876	504.32876	504.63876	504.125876
	50/60	600-690			5	504.16877	504.32877	504.63877	504.125877
	60	440-460			11	504.16875	504.32875	504.63875	504.125875
	50/60	380/440			3	504.16874	504.32874	504.63874	504.125874
	>300÷500	50÷690			2	504.16872	504.32872	504.63872	504.125872

□ Package/Bulk Pack.

(*) You can request the customised configuration of the cable input for the entire series of the ADVANCE-GRP[GD] socket. See table pg. 28.

- For frequencies > 100Hz the rated current is declassified to 25%.

- All versions include Ex cable gland and drilled-hole.

ACCESSORIES

EARTH STUD



CONTINUITY EARTH-PLATE TYPE "L"




AUXILIARY CONTACT



- Type "L" earth continuity plate available only with metal cable glands.

CONFIGURATION OPTIONAL ACCESSORIES

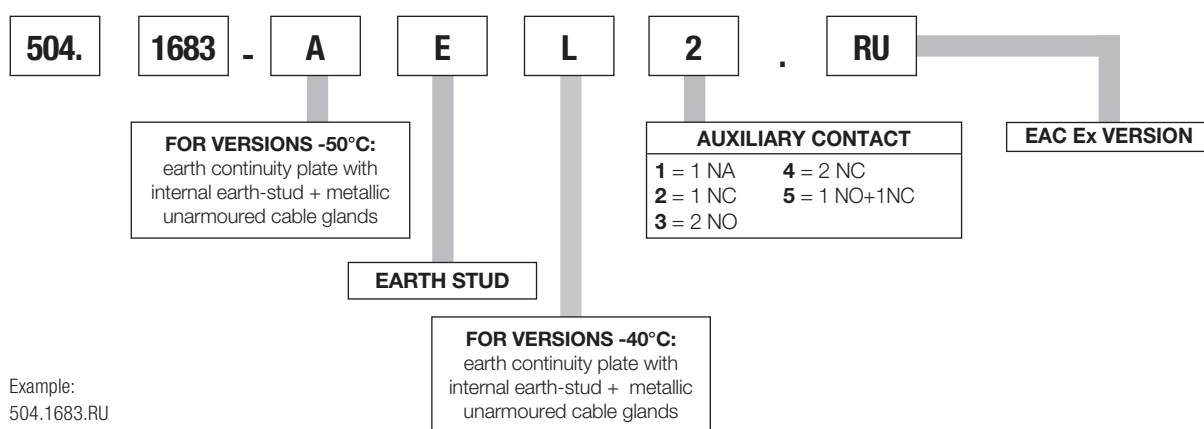

Example:
504.1683.RU
504.1683-A
504.1683-AE.RU

COMBINATIONS OF "POSSIBLE/NON POSSIBLE" PLUG/SOCKET CONNECTIONS

