


Fixed, three tier colour distribution in red, yellow and green




The "EVS" light effect ensures a maximum attention-grabbing effect (can be set with complete illumination)


TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

	Wall mounting	Base/Ceiling mounting
Dimensions (L x H x W):	112 mm x 485 mm x 125 mm	112 mm x 391 mm x 125 mm
Housing:	PA, black	
Lens:	PA, transparent	
Fixing:	Wall mounting, integrated mounting bracket Base mounting, Ceiling mounting	
Sound output:	85 dB (A)	
Clean*SIGN* red/green/yellow		
Connection:	Cable, 2 m long, included in the assembly	
Colours:	Pre-set colours: red/yellow/green	
Voltage:	24 V DC	
Current consumption:	Optical: < 120 mA per tier Buzzer: < 20 mA	
Order no.:	**695 300 55**	**695 310 55**
Clean*SIGN* RGY		
Connection:	Screw terminal max. 1.5 mm²	
Colours:	Colours selectable by dip-switch: red/yellow/green	
Voltage:	24 V DC	
Current consumption:	Optical: < 240 mA Buzzer: < 20 mA	
Order no.:	**695 200 55**	**695 210 55**
Clean*SIGN* RGB		
Connection:	Screw terminal max. 1.5 mm²	
Colours:	Red, yellow, green, white, blue, violet, turquoise Colours selectable by dip-switch	
Light effects:	Tier-by-tier illumination: Blinking light Complete illumination: EVS	
Voltage:	24 V DC	
Current consumption:	Optical: < 240 mA Buzzer: < 20 mA	
Order no.:	**695 000 55**	**695 010 55**

TECHNICAL DIAGRAMS:

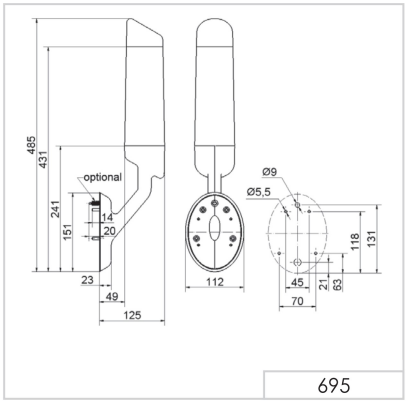

695

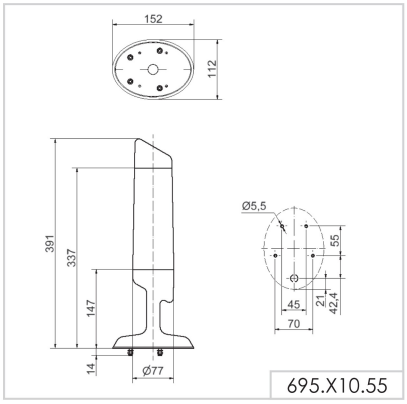

695.X10.55

695.300.55 695.310.55 695.200.55 695.210.55 695.000.55 695.010.55