


CRATER

Cable Glands for Non-armoured Cables

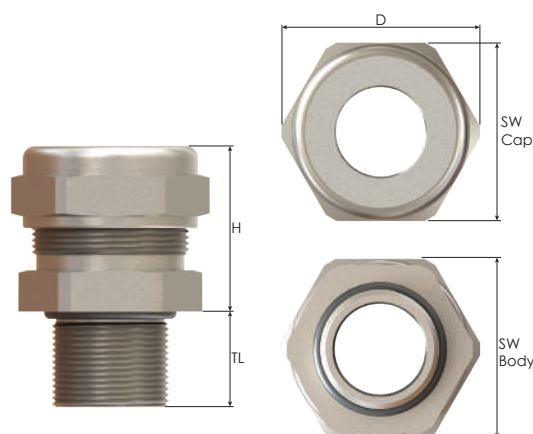

Thread Type **METRIC** acc. to ISO 965-3

Outer Thread Size (Male)	Clamping Range Ø min-max mm	Outer Thread Length TL mm	Spanner Width		Outer Ø D mm	max. Height H mm	Part Number
			Cap SW Cap mm	Body SW Body mm			
M16x1,5	3,0 - 8,5	16,0	26	22	29,0	27,0	KBU01M
	6,0 - 12,0	16,0	29	25	31,5	30,0	KBU01LM
M20x1,5	6,0 - 12,0	16,0	29	25	31,5	29,5	KBU1M
	12,0 - 14,5	16,0	30	28	33,5	30,0	KBU1LM
M25x1,5	6,0 - 12,0	18,0	29	29	31,5	30,5	KBU2SM
	12,0 - 16,0	18,0	34	32	37,0	30,5	KBU2M
	12,0 - 20,0	18,0	40	36	44,5	34,5	KBU2LM
M32x1,5	12,0 - 20,0	18,0	40	40	44,5	35,5	KBU3SM
	15,0 - 26,0	18,0	52	48	57,0	42,5	KBU3M
M40x1,5	15,0 - 26,0	18,0	52	48	57,0	42,5	KBU4SM
	20,0 - 32,0	18,0	60	55	66,0	52,0	KBU4M
M50x1,5	22,0 - 35,0	18,0	70	60	77,0	52,0	KBU5SM
	27,0 - 41,0	18,0	70	70	77,0	55,5	KBU5M
M63x1,5	35,0 - 45,0	20,0	80	75	89,5	63,5	KBU6SM
	40,0 - 52,0	20,0	85	85	94,0	63,5	KBU6M
M75x1,5	40,0 - 52,0	20,0	85	85	94,0	63,5	KBU7SM
	45,0 - 60,0	20,0	95	90	105,0	73,5	KBU7M
M90x1,5	45,0 - 60,0	20,0	95	95	105,0	73,5	KBU8SM
	60,0 - 72,0	20,0	115	110	127,0	85,5	KBU8M

Thread Type **NPT** acc. to ANSI ASME B1.20.1

Outer Thread Size (Male)	Clamping Range Ø min-max mm	Outer Thread Length TL mm	Spanner Width		Outer Ø D mm	max. Height H mm	Part Number
			Cap SW Cap mm	Body SW Body mm			
NPT 3/8"	3,0 - 8,5	16,0	26	22	29,0	27,0	KBU01N
	6,0 - 12,0	16,0	29	25	31,5	30,0	KBU01LN
NPT 1/2"	6,0 - 12,0	21,0	29	25	31,5	29,0	KBU1N
	12,0 - 14,5	21,0	30	28	33,5	30,0	KBU1LN
NPT 3/4"	6,0 - 12,0	21,0	29	29	31,5	30,5	KBU2SN
	12,0 - 16,0	21,0	34	32	37,0	30,5	KBU2N
	12,0 - 20,0	21,0	40	36	44,5	34,0	KBU2LN
NPT 1"	12,0 - 20,0	26,0	40	40	44,5	35,5	KBU3SN
	15,0 - 26,0	26,0	52	48	57,0	42,0	KBU3N
NPT 1 1/4"	15,0 - 26,0	28,0	52	48	57,0	44,0	KBU4SN
	20,0 - 32,0	28,0	60	55	66,0	52,0	KBU4N
NPT 1 1/2"	22,0 - 35,0	28,0	70	60	77,0	52,0	KBU5SN
	27,0 - 41,0	28,0	70	70	77,0	55,5	KBU5N
NPT 2"	35,0 - 45,0	28,0	80	75	89,5	63,0	KBU6SN
	40,0 - 52,0	28,0	85	85	94,0	63,5	KBU6N
NPT 2 1/2"	40,0 - 52,0	41,0	85	85	94,0	63,5	KBU7SN
	45,0 - 60,0	41,0	95	90	105,0	73,5	KBU7N
NPT 3"	45,0 - 60,0	43,0	95	95	105,0	73,5	KBU8SN
	60,0 - 72,0	43,0	115	110	127,0	85,5	KBU8N