


E-OCTANS

Cable Glands for Non-armoured Cables

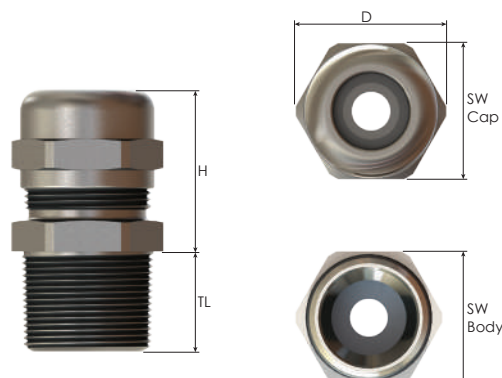

Thread Type **NPT** acc. to ANSI ASME B1.20.1

Outer Thread Size (Male)	Clamping Range		Outer Thread Length	Spanner Width		Outer Ø	max. Height	Part Number
	Ø min - max mm	Seal Type		SW Cap mm	SW Body mm			
NPT 1/4"	3,0 - 8,0	Double	16	20	20	22,0	29,0	EBU0N
	4,0 - 8,0	Triple	16	22	22	24,5	33,0	EBU0SN
NPT 3/8"	3,0 - 9,0	Double	16	20	20	22,0	29,0	EBU01SN
	4,0 - 12,0	Triple	16	22	22	24,5	33,0	EBU01N
NPT 1/2"	3,0 - 9,0	Double	16	20	22	24,5	29,0	EBU1SN
	4,0 - 12,0	Triple	16	22	22	24,5	29,0	EBU1N
	10,0 - 16,0	Triple	16	28	28	31,0	32,0	EBU12N
NPT 3/4"	4,0 - 12,0	Triple	16	22	28	31,0	29,0	EBU2SN
	10,0 - 18,0	Triple	16	28	28	31,0	32,0	EBU2N
	14,0 - 20,0	Triple	16	35	35	39,0	35,0	EBU23N
NPT 1"	10,0 - 18,0	Triple	20	28	35	39,0	32,5	EBU3SN
	14,0 - 24,0	Triple	20	35	35	39,0	35,0	EBU3N
	22,0 - 26,0	Triple	20	45	45	49,5	42,0	EBU34N
NPT 1 1/4"	14,0 - 24,0	Triple	20	35	45	49,5	35,0	EBU4SN
	22,0 - 32,0	Triple	20	45	45	49,5	42,5	EBU4N
	26,0 - 34,0	Triple	20	50	50	56,0	45,5	EBU45N
NPT 1 1/2"	22,0 - 32,0	Triple	20	45	55	61,0	42,5	EBU5SN
	26,0 - 35,0	Triple	20	50	55	61,0	45,5	EBU5N
	35,0 - 41,0	Triple	20	64	64	70,0	44,0	EBU56N
NPT 2"	26,0 - 35,0	Triple	20	50	68	75,0	45,5	EBU6SN
	35,0 - 45,0	Triple	20	64	68	75,0	45,0	EBU6N
	46,0 - 52,0	Triple	20	80	75	89,0	54,0	EBU67N
NPT 2 1/2"	35,0 - 45,0	Triple	21	64	80	89,0	45,0	EBU7SN
	46,0 - 62,0	Triple	21	80	80	89,0	53,5	EBU7N
	60,0 - 64,0	Triple	21	95	95	105,0	57,0	EBU78N
NPT 3"	46,0 - 62,0	Triple	21	80	95	105,0	53,5	EBU8SN
	60,0 - 75,0	Triple	21	95	95	105,0	57,0	EBU8N
	75,0 - 79,5	Triple	21	105	105	117,0	56,0	EBU810N
NPT 4"	60,0 - 75,0	Triple	21	95	115	128,0	57,0	EBU108N
	75,0 - 85,0	Triple	21	105	115	128,0	56,0	EBU10N
	85,0 - 95,0	Triple	21	115	115	128,0	58,0	EBU11N
	95,0 - 101,0	Triple	21	130	130	144,0	64,5	EBU115N
NPT 5"	95,0 - 105,0	Triple	27	130	145	162,0	64,5	EBU13N
	105,0 - 115,0	Triple	27	140	145	162,0	67,5	EBU130N