

Cable glands brass nickel-plated, IP68

EMC-Cable glands brass nickel-plated, IP68, fully mounted


To ensure correct EMP installation, the brass cable screws with EMP inserts should be used.

Material: brass nickel-plated, (halogen free)

lock nut/washer: TPR

temperature range: - 40°C to + 120°C

protection category: IP68

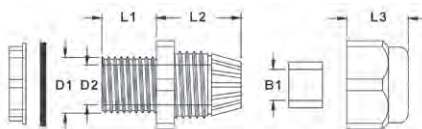

Art. no.		KB	D1	D2	B1	L1	L2	L3	WS	kg/100	PU	
250650	M12	3 - 8,5	12,0	8,4	6,8	6,2	17,0	10,9	14	0,013	10	
250652	M16	4 - 8	16,0	12,0	8,6	7,7	18,0	12,9	18	0,024	10	
250654	M20	6 - 12	20,0	16,0	11,9	8,1	20,0	13,9	22	0,030	10	
250656	M25	10-14	25,0	20,5	14,5	8,5	20,2	14,0	24-27	0,043	10	
250658	M32	15-22	32,0	27,0	21,5	10,0	24,5	18,0	35	0,085	10	
250660	M40	18-25	40,0	35,5	25,5	11,0	27,0	19,0	40-45	0,140	5	
250661	M40	22-30	40,0	35,0	30,5	11,0	28,0	20,5	45	0,140	5	
250662	M50	32-38	50,0	44,0	39,0	13,0	32,0	23,0	55-57	0,260	5	
250664	M63	37-44	63,0	55,5	44,5	14,0	34,0	22,0	64-68	0,380	5	
Art. no.		KB	D1	D2	B1	L1	L2	L3	WS	kg/100	PU	
250666	PG7	3-6,5	12,0	8,5	6,9	6,5	16,5	10,8	14	0,013	10	
250668	PG9	4-8	14,8	11,8	8,5	8,1	18,9	12,7	17	0,019	10	
250670	PG11	5-10	18,2	14,2	10,5	8,0	18,5	13,5	20-21	0,028	10	
250672	PG13,5	6-12	20,1	16,2	12,1	7,7	20,5	13,9	23-22	0,033	10	
250674	PG16	10-14	22,2	18,3	14,5	8,3	19,7	14,2	25-24	0,038	10	
250676	PG21	13-18	28,2	23,8	18,2	8,8	23,3	16,5	30	0,024	10	
250678	PG29	18-25	36,6	32,4	25,2	10,0	26,3	19,4	40	0,111	10	
250680	PG36	25-33	46,0	41,5	33,2	11,0	32,0	22,0	50	0,190	5	
250682	PG42	32-38	53,8	47,7	38,7	12,0	32,0	22,0	57	0,255	5	
250684	PG48	37-44	59,0	52,6	44,5	12,6	33,9	22,8	64	0,345	5	



haupa®

...convincing solutions

Germany: **HAUPA**, Koenigstr. 165-169, 42853 Remscheid, Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, sales@haupa.com