


Signaling Units

Monolithic tower lights

Harmony® type XVC Ø 40

Pre-assembled/pre-cabled tower lights

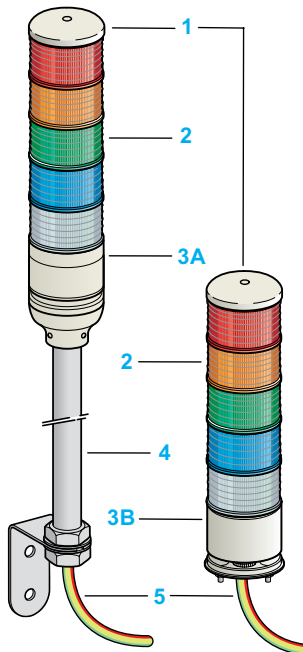

Description

XVC Ø 40, Ø 60 and Ø 100 mm tower lights comprise an assembly of:

- 1 cover.
- 2 One, two, three, four or five colored illuminated signaling units (Red, Orange, Green, Blue or Clear). Each illuminated unit is equipped with a LED (Super Bright LED).
- 3 A base mounted on the support tube **3A** or a base fitted with 3 screws **3B** for direct mounting on a horizontal surface.
- 4 A chromium plated-steel support tube mounted on a bracket (support tube depending on the model) for mounting on a vertical support (support tube on this page is for XVC Ø 40 mm and XVC Ø 60 mm).
- 5 Marked wires, with projecting length of 500 to 900 mm (depending on the model).

Pre-assembled and pre-cabled tower lights Ø 40 mm

Description	Light source (included)	Voltage V	Signaling colors (1)		Reference	Weight kg	
			Steady	Flashing (2)			
For support tube mounting, 17 mm, on horizontal (IP 54) or vertical (IP 23) surface							
Without buzzer	LED for steady light only	≈ 24	R	–	XVC4B1	0.500	
			R, O	–	XVC4B2	0.520	
			R, O, G	–	XVC4B3	0.540	
			R, O, G, B	–	XVC4B4	0.560	
			R, O, G, B, C	–	XVC4B5	0.580	
		~ 100-240	R	–	XVC4M1	0.720	
			R, O	–	XVC4M2	0.750	
			R, O, G	–	XVC4M3	0.780	
			R, O, G, B	–	XVC4M4	0.810	
			R, O, G, B, C	–	XVC4M5	0.840	
	With buzzer Sound level at 1 m: 70 to 85 dB, continuous or intermittent tone + flashing light	LED for steady or flashing light	≈ 24	R	R	XVC4B15S	0.600
				R, O	R, O	XVC4B25S	0.620
				R, O, G	R, O, G	XVC4B35S	0.640
				R, O, G, B	R, O, G, B	XVC4B45S	0.660
				R, O, G, B, C	R, O, G, B, C	XVC4B55S	0.680
~ 100-240			R	R	XVC4M15S	0.740	
			R, O	R, O	XVC4M25S	0.770	
			R, O, G	R, O, G	XVC4M35S	0.800	
			R, O, G, B	R, O, G, B	XVC4M45S	0.830	
			R, O, G, B, C	R, O, G, B, C	XVC4M55S	0.860	

For direct base mounting on horizontal surface (IP 54)

Without buzzer	LED for steady light only	~ 24	R	–	XVC4B1K	0.100
			R, O	–	XVC4B2K	0.120
			R, O, G	–	XVC4B3K	0.140
			R, O, G, B	–	XVC4B4K	0.160
			R, O, G, B, C	–	XVC4B5K	0.180

Accessories for support tube mounting (for tower lights XVC4●● and XVC4●●5S)

Description	Diameter mm	Minimum height to be added	Reference	Weight kg
Metal fixing plate IP 54	90	32	XVCZ11	0.100
Plastic fixing plate IP 54	84	24.5	XVCZ01	0.060
Wall mounting bracket IP 54	–	82	XVCZ31	0.130

(1) Signaling colors: R: Red, O: Orange, G: Green, B: Blue, C: Clear. The colors are listed in the same order as the mounting order of the illuminated units (from top to bottom).

(2) Flashing function can be simply selected/programmed by wiring.

