


Signaling Units

Monolithic tower lights

Harmony® type XVC Ø 60

Pre-assembled/pre-cabled tower lights

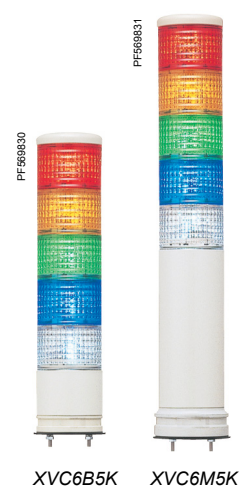

Pre-assembled and pre-cabled tower lights Ø 60 mm							
Description	Light source (included)	Voltage V	Signaling colors (1)		Reference	Weight kg	
			Steady	Flashing (2)			
For support tube mounting, 22 mm, on horizontal (IP 54) or vertical (IP 23) surface							
Without buzzer	LED for steady light only	≈ 24	R	–	XVC6B1	0.700	
			R, O	–	XVC6B2	0.740	
			R, O, G	–	XVC6B3	0.780	
			R, O, G, B	–	XVC6B4	0.820	
			R, O, G, B, C	–	XVC6B5	0.860	
		~ 100-240	R	–	XVC6M1	0.960	
			R, O	–	XVC6M2	1.020	
			R, O, G	–	XVC6M3	1.070	
			R, O, G, B	–	XVC6M4	1.120	
			R, O, G, B, C	–	XVC6M5	1.180	
	With buzzer Sound level at 1 m: 70 to 85 dB, continuous or intermittent tone + flashing light	LED for steady or flashing light	≈ 24	R	R	XVC6B15S	0.900
				R, O	R, O	XVC6B25S	0.940
				R, O, G	R, O, G	XVC6B35S	0.980
				R, O, G, B	R, O, G, B	XVC6B45S	1.020
				R, O, G, B, C	R, O, G, B, C	XVC6B55S	1.060
~ 100-240			R	R	XVC6M15S	1.010	
			R, O	R, O	XVC6M25S	1.070	
			R, O, G	R, O, G	XVC6M35S	1.120	
			R, O, G, B	R, O, G, B	XVC6M45S	1.170	
			R, O, G, B, C	R, O, G, B, C	XVC6M55S	1.230	
For base mounting on horizontal surface (IP 54)							
Without buzzer	LED for steady light only	≈ 24	R	–	XVC6B1K	0.200	
			R, O	–	XVC6B2K	0.250	
			R, O, G	–	XVC6B3K	0.300	
			R, O, G, B	–	XVC6B4K	0.350	
			R, O, G, B, C	–	XVC6B5K	0.400	
		~ 100-240	R	–	XVC6M1K	0.440	
			R, O	–	XVC6M2K	0.500	
			R, O, G	–	XVC6M3K	0.550	
			R, O, G, B	–	XVC6M4K	0.600	
			R, O, G, B, C	–	XVC6M5K	0.660	
	With buzzer Sound level at 1 m: 70 to 85 db, continuous or intermittent tone + flashing light	LED for steady or flashing light	≈ 24	R	R	XVC6B15SK	0.200
				R, O	R, O	XVC6B25SK	0.250
				R, O, G	R, O, G	XVC6B35SK	0.300
				R, O, G, B	R, O, G, B	XVC6B45SK	0.350
				R, O, G, B, C	R, O, G, B, C	XVC6B55SK	0.400
~ 100-240			R	R	XVC6M15SK	0.490	
			R, O	R, O	XVC6M25SK	0.550	
			R, O, G	R, O, G	XVC6M35SK	0.600	
			R, O, G, B	R, O, G, B	XVC6M45SK	0.650	
			R, O, G, B, C	R, O, G, B, C	XVC6M55SK	0.710	

Accessories for support tube mounting or base mounting					
Description	Utilization for	Diameter mm	Minimum height to be added (mm)	Reference	Weight kg
Metal fixing plate IP 54	Support-tube mounting with XVC6●● and XVC6●●5S	100	30	XVCZ02	0.080
Metal fixing plate IP 54	Direct base mounting with XVC6●●K and XVC6●●5SK	84	21.6	XVCZ12	0.100
Wall mounting bracket IP 54	Support-tube mounting with XVC6●● and XVC6●●5S	–	82	XVCZ32	0.130

(1) Signaling colors: R: Red, O: Orange, G: Green, B: Blue, C: Clear. The colors are listed in the same order as the mounting order of the illuminated units (from top to bottom).

(2) Flashing function can be simply selected/programmed by wiring.