


I/O System – 750 and 753 Series; Intrinsically Safe Modules Ex i

Contents

Function	Description	Item Number	Page
Power Supplies Ex i	Power Supply; 24 VDC; Diagnostics; Intrinsically safe	750-606*	310
	Power Supply; 24 VDC; Intrinsically safe	750-625/000-001	310
Digital Inputs Ex i for Proximity Sensors per EN 60947-5-6	1-Channel Digital Input; NAMUR; Intrinsically safe	750-435	311
	2-Channel Digital Input; NAMUR; Intrinsically safe	750-438	311
	Intrinsically Safe 4-Channel Digital Input; 24 VDC; PROFIsafe V 2.0 iPar	750-663/000-003	312
	8-Channel Digital Input; NAMUR; Intrinsically safe	750-439*	313
Digital Outputs Ex i	2-Channel Digital Output; 24 VDC; Intrinsically safe	750-535*	314
	4-Channel Digital Output; 24 VDC; Valve; Intrinsically safe	750-539	314
	2-Channel Relay Output; Changeover contact; Potential-free; Intrinsically safe	750-538	315
Analog Inputs Ex i	2-Channel Analog Input; 4 ... 20 mA; Intrinsically safe	750-485	316
	4-Channel Analog Input; 0/4 ... 20 mA; NAMUR NE43; Intrinsically safe	750-486*	316
	2-Channel Analog Input; 4 ... 20 mA HART; Intrinsically safe	750-484*	317
	2-Channel Analog Input; 4 ... 20 mA HART; NAMUR NE43; Intrinsically safe	750-484/000-001	317
	2-Channel Analog Input; RTD; Intrinsically safe	750-481/003-000*	318
	2-Channel Analog Input; TC; Intrinsically safe	750-487/003-000	318
Analog Outputs Ex i	2-Channel Analog Output; 0 ... 20 mA; Intrinsically safe	750-585*	319
	2-Channel Analog Output; 4 ... 20 mA; Intrinsically safe	750-586	319
Function Module Ex i	Up/Down Counter; Intrinsically safe	750-633*	320
*This module is also available as a variant of the 750 XTR Series.		See Section 6	

5.9
Ex i

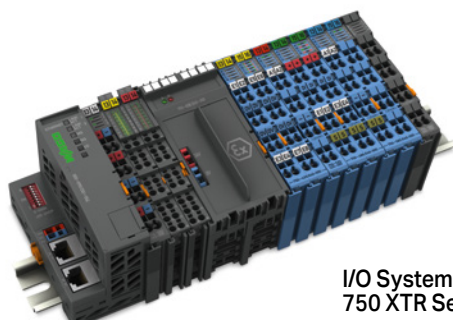

I/O System –
750 XTR Series