

Quick-Finder EvoSIGNAL Mini - Horns & Sirens



12 V AC/DC

160 700 74

24 V AC/DC

160 700 75

115-230 V AC

160 700 60

+ Mounting adapter (compulsory!)

Base mounting



Order no.
260 700 01

Installation
mounting M22



Order no.
260 700 03

Installation
mounting PG 29




Order no.
260 700 04

Tube mounting



Order no.
260 700 05

Bracket mounting
with cable gland




Order no.
260 700 06


Bracket mounting




Order no.
260 700 07

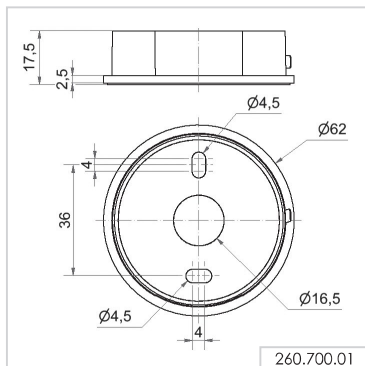


260.700.01

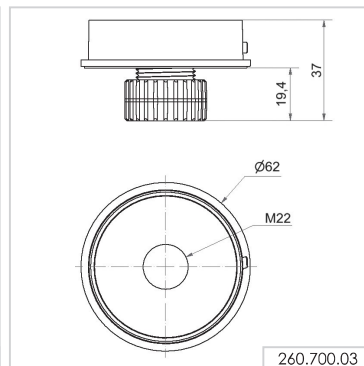


260.700.03

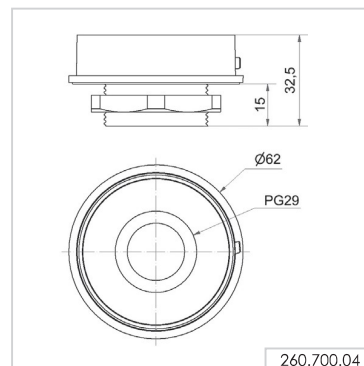


260.700.04

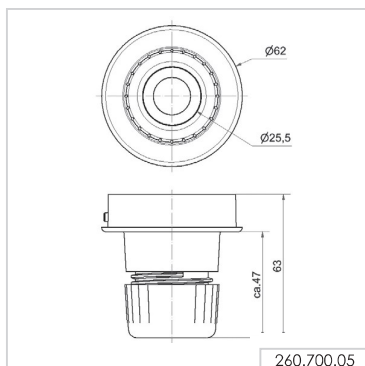

260.700.05

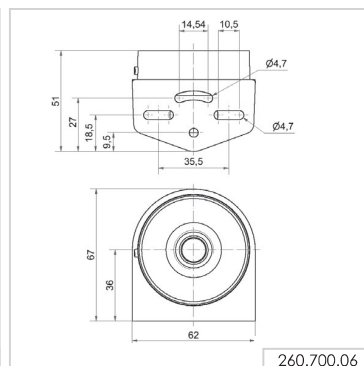

260.700.06

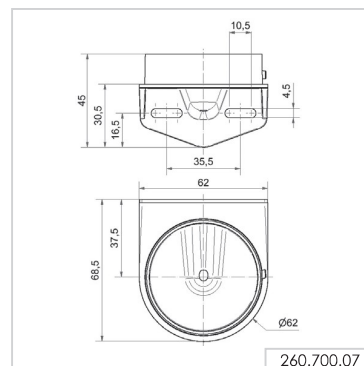

260.700.07

Horns & Sirens





Bracket mounting
with cable gland

EvoSIGNAL Mini - Horns & Sirens


① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	62 mm x 85 mm		
Housing:	PC/ABS		
Lens:	PC, grey		
Fixing:	Base/Tube/Wall and Installation mounting		
Cable entry:	Cable diameter 8-12 mm		
Connection:	Push-In terminal max. 1.5 mm ²		
Tone type:	Pulse or Permanent tone		
Voltage:	12 V AC/DC	24 V AC/DC	115-230 V AC
Current consumption:	≤ 30 mA	≤ 40 mA	≤ 30 mA
Order no.	160 700 74	160 700 75	160 700 60

✂ ACCESSORIES:

Base mounting	260 700 01
Installation mounting M22	260 700 03
Installation mounting PG 29	260 700 04
Tube mounting	260 700 05
Bracket mounting with cable gland	260 700 06
Bracket mounting	260 700 07

↔ TECHNICAL DIAGRAM:

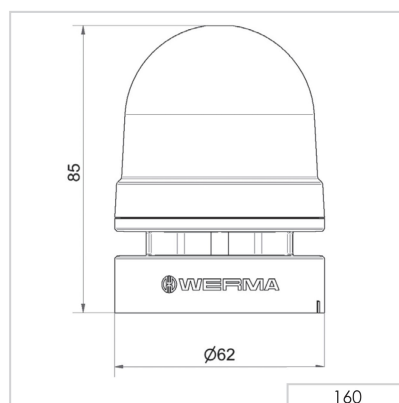

260.700.01 260.700.03 260.700.04 260.700.05
260.700.06 260.700.07

Signalisation index

Permanent	5
Pulse	6