

TRANSFORMERS / RECTIFIED POWER SUPPLIES

1-/2-phase

– OUTPUT: 24 V DC (SELV)



Approvals: 

MTPS

INPUT: 230/400 V AC




Circuit diagram

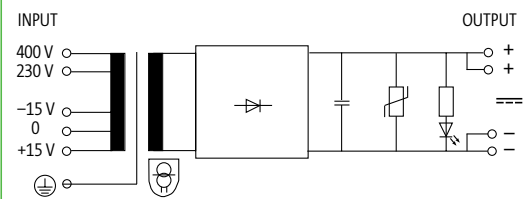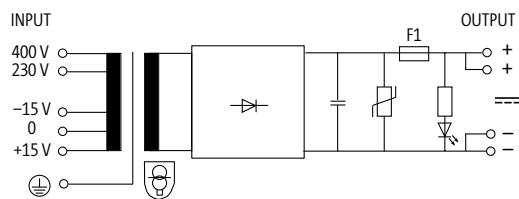

Order Data	H×W×D/kg	Art-No.	H×W×D/kg	Art-No.
24 V DC/0.5 A	108×87×124/1.3	85400		
24 V DC/1 A	108×87×124/1.3	85401		
24 V DC/2 A	108×87×142/2.0	85402		
24 V DC/4 A	108×87×165/2.9	85403		
24 V DC/6 A	153×123×153/4.9	85404		
24 V DC/10 A			153×123×185/7.7	85405
Input				
Input voltage	230/400 ±15 V AC			
Frequency	50...60 Hz			
LED display	LED (green) for input voltage			
Output				
Output voltage	24 V DC (SELV)			
Ripple	max. 5 %rms			
Output filter	LED, VDR and smoothing capacitor			
General data				
Standards	EN 61558-2-6, EN 62041 category I, EN 55011 B, EN 61000-3-2			
Temperature range	-20...+60 °C, no condensation			
Mounting method	DIN-rail mountable TH35-15 (EN 60715) or for key-hole mounting		Key-hole mounting	

Dimension drawing

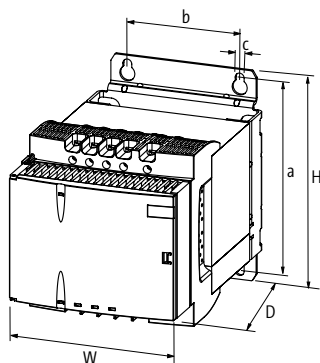

Notes