



No improvisation
on safety!

Emergency Lighting

Standard, self-testing and connected luminaires



se.com

Life Is On

Schneider
Electric



Contents

Exiway Light	4
Emergency Lighting.....	4
Technical guide.....	10
 Exiway Trend	 12
Emergency Lighting.....	12
Technical guide.....	18
 Index	 21

An escalation on innovation

Exiway Light Activa-link with Facility Expert Small Business (FESB) allows you to:

- View the status of each luminaire.
- Receive notification in real time in case of any fault (battery, wrong installation etc.).
- Access to remote monitoring and reporting tools of your Emergency Lighting system.
- Future add-on of other devices, like energy and temperature sensors, in the same Facility Expert SB system, that help to monitor all your critical equipment from the same App.




Up to
500
lumens

20 metres

Legibility distance in
compliance with EN 1838

1. Each detail has been optimised

P148660

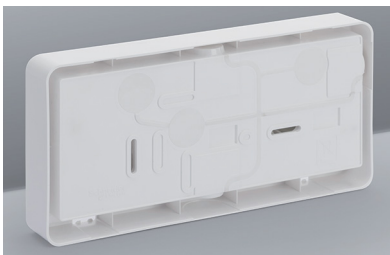

With easy-to-drill and pre-cut holes
and 16 mm Ø tube inlet.


2. Choose your light level

P148660



Maintained mode (M/always ON),
Not-Maintained mode (NM/Only
Emergency), selection can be done from
jumper.

P148677

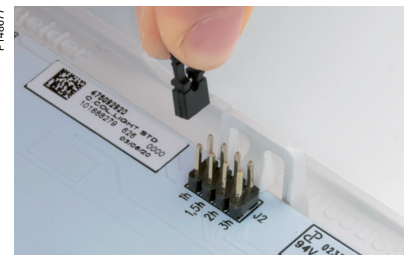

3 models cover 15 different performances.
Autonomy can be selected:
standard autonomy is 1 hour, but can be
increased to 1.5, 2 or 3 hours depending on
the project specifications.

3. Discrete and aesthetic design



Small and nicely shaped, perfect legibility.

4. Dedicated accessories



Removable pictograms with Led lens to be positioned under the transparent cover glass.

Led lens improve legibility of pictogram panels (EN1838)

Transparent cover glass hold internally the removable pictograms panels.

5. Fast installation



5 bi-material entry cables

Design optimized to improve easiness of installation.
Rubber entry cables IP65 certified.



Pre-cutted frame

For upper and lateral entry cable



Detachable connector easy to handle for Standard and Activa versions.
Screwless connector for Activa-link models for an even faster and more reliable installation.




Quick fastener coupling reflector

6 Easy to transform



The light fitting can be transformed easily, only 3 pictograms for all the signs

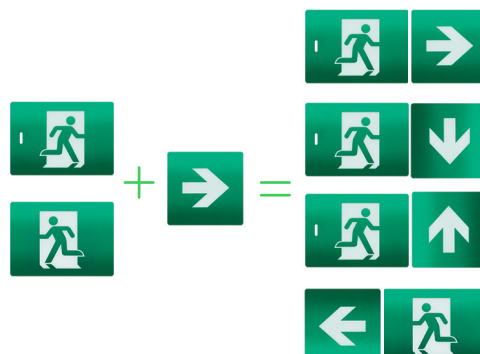

Exiway Light

IP42 / 65, IK09



CE




Technical specifications

- Standard version, available for maintained (M) or not-maintained (NM) operation by setting a jumper
- Self-testing version (Activa and Activa-link), available for maintained (M) or not-maintained (N.M) operation by setting a jumper or using external switch
- Selectable duration: 1 h, 1.5 h, 2 h or 3 h by jumper
- Installation: quick mounting on wall or ceiling
- Compliant with EN 60598-2-22, EN 62034, EN 62471 - group 0 standards
- Compliant with RED 2014/53/UE (Activa-link)
- Protection rating: IP42 / 65, IK09
- Insulation class: II
- Operating temperature: 0...40 °C
- Fire behaviour (EN 60695-2-10), incandescent wire: 850 °C
- Case of self-extinguishing polycarbonate 94V-2 (UL 94)
- Light source: long-lasting LED light source (> 10 years expected in typical ambient temperature* condition)
- Power supply: 230 V, 50/60 Hz
- Complete recharge: 12 h for all products
- Exiway Light Activa-link is compatible with the PowerTag Link C+ (ref. **A9XELC10**)

(*) Typical environment temperature: 25 °C.

Dimensions(mm)

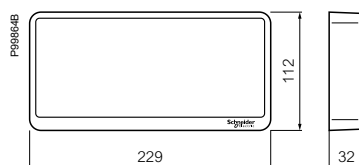

Installation methods

P148682



Quick mounting

P148683



Wall
(installation without
accessories)



Flag
Bracket for flag installation
(Ref. **OVA53226**)

P148684



Ceiling
(installation without
accessories)



Ceiling
Bracket for ceiling installation
(Ref. **OVA53227**)

Exiway Light

IP42 / 65, IK09

Product catalogue numbers

Exiway Light		Protection rating	Autonomy (h)	Emergency flux (lm)	Maintained flux (lm)	Equivalent lamp power (W)	Consumption		Maintained mode		LiFePO4 battery		Weight (kg)	Cat. no.
							Emergency condition (N.M)	(W)	(VA)	(M)	(W)			
			(VA)											
	Standard version													
	IP42	IK09	1	110	70	19 x 0.3 W	11.5	0.4	11.1	0.8	3.2 V	0.57 Ah	0.34	OVA44010
			1.5	90										
			2	70										
			3	50										
	IP65	IK09	1	110	70	19 x 0.3 W	11.5	0.4	11.1	0.8	3.2 V	0.57 Ah	0.35	OVA44011
			1.5	90										
			2	70										
			3	50										
	IP42	IK09	1	250	150	19 x 0.3 W	24.3	1	23.9	1.9	3.2 V	1.5 Ah	0.36	OVA44012
			1.5	200										
			2	150										
			3	120										
	IP65	IK09	1	250	150	19 x 0.3 W	24.3	1	23.9	1.9	3.2 V	1.5 Ah	0.37	OVA44013
			1.5	200										
			2	150										
			3	120										
	IP42	IK09	1	500	230	25 x 0.3 W	24.2	1	23.5	2.3	6.4 V	1.5 Ah	0.41	OVA44014
			1.5	400										
			2	300										
			3	250										
	IP65	IK09	1	500	230	25 x 0.3 W	24.2	1	23.5	2.3	6.4 V	1.5 Ah	0.42	OVA44015
			1.5	400										
			2	300										
			3	250										
	Activa version													
	IP42	IK09	1	110	70	19 x 0.3 W	3.9	0.31	5	1.69	3.2 V	0.57 Ah	0.34	OVA44110
			1.5	90										
			2	70										
			3	50										
	IP65	IK09	1	110	70	19 x 0.3 W	3.9	0.31	5	1.69	3.2 V	0.57 Ah	0.35	OVA44111
			1.5	90										
			2	70										
			3	50										
	IP42	IK09	1	250	150	19 x 0.3 W	4.7	0.29	7.9	3.06	3.2 V	1.5 Ah	0.36	OVA44112
			1.5	200										
			2	150										
			3	120										
	IP65	IK09	1	250	150	19 x 0.3 W	4.7	0.29	7.9	3.06	3.2 V	1.5 Ah	0.37	OVA44113
			1.5	200										
			2	150										
			3	120										
	IP42	IK09	1	500	230	25 x 0.3 W	5.7	0.32	9.3	3.62	6.4 V	1.5 Ah	0.41	OVA44114
			1.5	400										
			2	300										
			3	250										
	IP65	IK09	1	500	230	25 x 0.3 W	5.7	0.32	9.3	3.62	6.4 V	1.5 Ah	0.42	OVA44115
			1.5	400										
			2	300										
			3	250										
	Activa-link version													
	IP42	IK09	1	110	70	19 x 0.3 W	3.9	0.31	5	1.69	3.2 V	0.57 Ah	0.34	OVA44210
			1.5	90										
			2	70										
			3	50										
	IP65	IK09	1	110	70	19 x 0.3 W	3.9	0.31	5	1.69	3.2 V	0.57 Ah	0.35	OVA44211
			1.5	90										
			2	70										
			3	50										
	IP42	IK09	1	250	150	19 x 0.3 W	4.7	0.29	7.9	3.06	3.2 V	1.5 Ah	0.36	OVA44212
			1.5	200										
			2	150										
			3	120										
	IP65	IK09	1	250	150	19 x 0.3 W	4.7	0.29	7.9	3.06	3.2 V	1.5 Ah	0.37	OVA44213
			1.5	200										
			2	150										
			3	120										
	IP42	IK09	1	500	230	25 x 0.3 W	5.7	0.32	9.3	3.62	6.4 V	1.5 Ah	0.41	OVA44214
			1.5	400										
			2	300										
			3	250										
	IP65	IK09	1	500	230	25 x 0.3 W	5.7	0.32	9.3	3.62	6.4 V	1.5 Ah	0.42	OVA44215
			1.5	400										
			2	300										
			3	250										

Accessory catalogue numbers

	Compatibility	Dimensions (mm) height x width x depth	Cat. no.
Exit sign kit (set of 3) Visibility 20 m 	All	90 x 134 x 0.25	OVA53214
Opaline cover glass 	All	112 x 229 x 2	OVA53215
Led lens 	All	14 x 168 x 4	OVA53216
Protective grids IK10 	All	178 x 296 x 73	OVA59824
Bracket for flag installation 	All	-	OVA53226
Bracket for ceiling installation 	All	-	OVA53227

Spare parts catalogue numbers

	Description	Compatibility	Cat. no.
Batteries (LiFePO4) 	3.2 V, 0.57 Ah	OVA44010, OVA44011, OVA44110, OVA44111, OVA44210, OVA44211	OVA51170
	3.2 V, 1.5 Ah	OVA44012, OVA44013, OVA44112, OVA44113, OVA44212, OVA44213	OVA51168
	6.4 V, 1.5 Ah	OVA44014, OVA44015, OVA44114, OVA44115, OVA44214, OVA44215	OVA51172

PowerTag Link C+

For the connection of Exiway Light Activa-link to the APP Facility Expert Small Business.





A9XELC10

Exiway Light

Emergency lighting spacing table

Exiway Light (Standard, Activa and Activa-link)





A and E: Transverse spacing to wall
B and F: Transverse spacing between luminaires
C and G: Axial spacing to wall
D and H: Axial spacing between luminaires

Catalog number	Installation height for ceiling mounting	Lux level directly under luminaires	Escape routes 1 Lux min. Along centre line				Area covered to obtain more than 1 Lux on the ground	Open (Anti-Panic) areas 0.5 Lux min. Luminaires arranged in a regular array				Area covered to obtain 0.5 Lux on the ground
			A	B	C	D		E	F	G	H	
Autonomy 1 h	(m)	(lux)	(m)	(m)	(m)	(m)	(m²)	(m)	(m)	(m)	(m)	(m²)
OVA44010	2.00	9.72	2.94	7.11	2.83	7.07	26.18	3.02	7.25	2.93	6.99	38.38
OVA44011	2.50	6.22	3.09	7.81	2.98	7.74	27.89	3.27	8.11	3.17	7.75	46.95
OVA44110	3.00	4.32	3.16	8.26	3.08	8.22	31.46	3.43	8.75	3.36	8.39	53.55
OVA44111	3.50	3.17	3.15	8.57	3.07	8.49	29.16	3.51	9.42	3.44	9.14	56.49
OVA44210	4.00	2.43	3.07	8.77	2.99	8.73	28.56	3.60	10.03	3.52	9.56	61.88
OVA44211	5.00	1.56	2.55	8.81	2.47	8.73	22.31	3.62	10.84	3.52	10.36	59.50
	6.00	1.08	0.95	8.36	0.82	8.29	0.00	3.63	11.25	3.19	10.86	50.88
OVA44012	2.00	22.09	3.80	8.69	3.65	8.88	43.14	3.67	8.25	3.54	8.48	61.88
OVA44013	2.50	14.14	4.12	9.88	4.00	9.87	52.07	3.98	9.79	3.88	9.69	76.70
OVA44112	3.00	9.82	4.41	10.72	4.28	10.66	58.91	4.26	10.90	4.16	10.43	87.69
OVA44113	3.50	7.21	4.60	11.37	4.44	11.31	63.78	4.53	11.83	4.39	11.34	102.05
OVA44212	4.00	5.52	4.73	12.03	4.56	11.92	61.88	4.77	12.50	4.62	11.89	107.11
OVA44213	5.00	3.54	4.79	12.80	4.66	12.63	59.50	5.00	13.90	4.89	13.40	128.31
	6.00	2.45	4.65	13.21	4.48	13.10	64.26	5.21	14.98	5.05	14.47	139.24
	7.00	1.80	4.21	13.34	4.08	13.29	58.31	5.23	15.94	5.09	15.28	123.92
	8.00	1.38	3.44	13.13	3.27	13.01	19.04	5.19	16.60	4.97	15.92	152.33
	9.00	1.09	1.71	12.66	1.55	12.55	0.00	5.09	17.06	4.65	16.52	120.50
OVA44014	2.00	44.31	4.49	9.67	4.44	10.56	61.88	4.25	8.50	4.21	9.56	83.90
OVA44015	2.50	28.36	5.13	11.30	4.91	11.85	76.70	4.75	10.40	4.57	11.16	110.64
OVA44114	3.00	19.69	5.53	12.73	5.30	12.94	89.70	5.14	11.90	4.95	12.41	133.21
OVA44115	3.50	14.47	5.83	13.97	5.66	13.96	102.96	5.43	13.48	5.29	13.55	152.16
OVA44214	4.00	11.08	6.10	14.82	5.93	14.81	107.11	5.73	14.75	5.58	14.48	173.75
OVA44215	5.00	7.09	6.52	16.24	6.34	16.08	130.17	6.23	16.83	6.08	16.01	208.26
	6.00	4.92	6.78	17.30	6.55	17.22	139.24	6.66	18.24	6.45	17.41	235.64
	7.00	3.62	6.82	18.08	6.58	17.92	127.56	6.89	19.48	6.67	18.81	258.77
	8.00	2.77	6.71	18.65	6.48	18.41	152.33	7.06	20.74	6.83	20.06	252.30
	9.00	2.19	6.42	18.97	6.19	18.72	120.50	7.15	21.86	6.91	20.97	289.19
	10.00	1.77	5.95	18.98	5.66	18.81	104.13	7.20	22.48	6.87	21.78	238.02
Autonomy 1.5 h	(m)	(lux)	A	B	C	D	(m²)	E	F	G	H	(m²)
OVA44010	2.00	7.92	2.70	6.69	2.63	6.66	22.61	2.89	6.95	2.82	6.70	35.11
OVA44011	2.50	5.07	2.83	7.28	2.75	7.28	24.17	3.11	7.62	3.04	7.36	40.91
OVA44110	3.00	3.52	2.87	7.68	2.80	7.65	21.42	3.23	8.18	3.16	8.00	45.52
OVA44111	3.50	2.59	2.78	7.91	2.73	7.88	22.78	3.27	8.96	3.22	8.69	47.38
OVA44210	4.00	1.98	2.60	8.04	2.52	7.97	19.04	3.34	9.41	3.26	9.06	52.36
OVA44211	5.00	1.27	1.80	7.78	1.72	7.74	7.44	3.27	10.17	3.16	9.80	44.63
OVA44012	2.00	17.60	3.46	8.39	3.40	8.43	36.00	3.49	8.14	3.44	8.25	54.74
OVA44013	2.50	11.27	3.81	9.31	3.74	9.26	42.30	3.79	9.42	3.72	9.32	68.80
OVA44112	3.00	7.82	4.05	9.99	3.95	9.94	50.88	4.04	10.31	3.95	9.98	78.99
OVA44113	3.50	5.75	4.17	10.63	4.06	10.58	49.20	4.29	10.99	4.19	10.55	83.83
OVA44212	4.00	4.40	4.25	11.11	4.14	11.06	59.50	4.44	11.72	4.34	11.39	95.21
OVA44213	5.00	2.82	4.16	11.71	4.12	11.66	59.50	4.59	13.03	4.55	12.68	98.55
	6.00	1.96	3.86	11.95	3.75	11.90	42.84	4.73	14.07	4.61	13.59	117.82
	7.00	1.44	3.19	11.75	3.08	11.70	43.74	4.65	14.81	4.51	14.32	116.63
	8.00	1.10	1.66	11.31	1.52	11.20	9.52	4.64	15.38	4.28	14.88	99.97
OVA44014	2.00	35.09	4.19	9.37	4.10	10.03	54.15	4.04	8.51	3.96	9.51	75.87
OVA44015	2.50	22.46	4.70	10.91	4.51	11.24	67.87	4.51	10.15	4.34	10.71	97.62
OVA44114	3.00	15.60	5.04	12.10	4.90	12.17	78.32	4.82	11.53	4.69	11.85	115.14
OVA44115	3.50	11.46	5.39	13.10	5.19	13.03	83.83	5.14	12.98	4.97	12.88	135.76
OVA44214	4.00	8.77	5.66	13.86	5.46	13.72	97.59	5.44	14.11	5.26	13.70	144.00
OVA44215	5.00	5.61	5.91	15.11	5.75	15.04	100.41	5.86	15.66	5.72	14.92	171.07
	6.00	3.90	6.05	16.07	5.84	15.93	117.82	6.18	17.09	5.98	16.49	203.50
	7.00	2.86	5.98	16.54	5.77	16.47	116.63	6.35	18.47	6.14	17.68	207.74
	8.00	2.19	5.76	16.86	5.55	16.79	104.73	6.47	19.52	6.25	18.71	233.26
	9.00	1.73	5.20	16.93	4.99	16.79	72.30	6.50	20.25	6.26	19.61	192.79
	10.00	1.40	4.45	16.71	4.24	16.56	59.50	6.41	21.05	6.14	20.40	238.02

Exiway Light

Emergency lighting spacing table

Exiway Light (Standard, Activa and Activa-link)



A and E: Transverse spacing to wall
B and F: Transverse spacing between luminaires
C and G: Axial spacing to wall
D and H: Axial spacing between luminaires

Catalog number	Installation height for ceiling mounting	Lux level directly under luminaires	Escape routes 1 Lux min. Along centre line				Area covered to obtain more than 1 Lux on the ground	Open (Anti-Panic) areas 0.5 Lux min. Luminaires arranged in a regular array				Area covered to obtain 0.5 Lux on the ground
			A	B	C	D		E	F	G	H	
Autonomy 2 h	(m)	(lux)	(m)	(m)	(m)	(m)	(m²)	(m)	(m)	(m)	(m)	(m²)
OVA44010	2.00	6.20	2.45	6.19	2.36	6.16	17.85	2.72	6.39	2.64	6.02	29.75
OVA44011	2.50	3.97	2.54	6.70	2.46	6.61	20.45	2.89	7.09	2.80	6.78	35.33
OVA44110	3.00	2.75	2.45	6.93	2.41	6.84	21.42	2.94	7.72	2.90	7.41	34.81
OVA44111	3.50	2.02	2.32	7.09	2.25	7.03	14.58	3.01	8.30	2.94	7.90	40.09
OVA44210	4.00	1.55	1.95	7.02	1.93	6.99	14.28	2.95	8.63	2.92	8.23	38.08
OVA44012	2.00	13.28	3.20	7.77	3.11	7.73	33.32	3.26	7.80	3.18	7.70	47.60
OVA44013	2.50	8.50	3.47	8.49	3.35	8.40	37.19	3.53	8.82	3.42	8.53	55.79
OVA44112	3.00	5.90	3.61	9.20	3.48	9.07	38.16	3.79	9.42	3.68	9.03	62.26
OVA44113	3.50	4.34	3.69	9.72	3.59	9.59	42.82	3.95	10.08	3.86	9.68	72.89
OVA44212	4.00	3.32	3.70	9.97	3.60	9.84	38.08	4.01	10.83	3.92	10.42	76.17
OVA44213	5.00	2.12	3.44	10.36	3.34	10.27	29.75	4.18	11.92	4.08	11.40	85.54
	6.00	1.48	2.73	10.16	2.70	10.20	32.13	4.08	12.71	4.04	12.16	85.69
	7.00	1.08	0.95	9.71	0.80	9.67	0.00	4.19	13.23	3.59	12.79	69.25
OVA44014	2.00	26.44	3.88	8.93	3.80	9.37	47.31	3.83	8.10	3.76	8.90	66.94
OVA44015	2.50	16.92	4.29	10.25	4.16	10.37	55.79	4.22	9.72	4.11	10.11	82.75
OVA44114	3.00	11.75	4.62	11.28	4.49	11.23	62.93	4.50	11.13	4.39	11.16	99.07
OVA44115	3.50	8.63	4.86	12.00	4.77	11.95	72.89	4.78	12.08	4.70	11.98	109.34
OVA44214	4.00	6.61	5.03	12.74	4.94	12.62	77.36	5.02	13.08	4.94	12.70	133.29
OVA44215	5.00	4.23	5.22	13.76	5.09	13.64	83.68	5.38	14.55	5.26	14.02	148.76
	6.00	2.94	5.17	14.30	5.03	14.18	85.69	5.53	15.93	5.40	15.38	155.31
	7.00	2.16	4.90	14.63	4.77	14.50	72.89	5.70	16.75	5.55	16.35	174.94
	8.00	1.65	4.34	14.66	4.21	14.47	57.12	5.67	17.69	5.51	17.28	152.33
	9.00	1.31	3.41	14.32	3.28	14.19	24.10	5.62	18.30	5.42	17.88	156.64
	10.00	1.06	0.79	13.75	0.79	13.68	0.00	5.27	19.07	5.27	18.48	119.01
Autonomy 3 h	(m)	(lux)	A	B	C	D	(m²)	E	F	G	H	(m²)
OVA44010	2.00	4.43	2.13	5.56	2.07	5.53	14.58	2.47	5.77	2.42	5.50	24.10
OVA44011	2.50	2.84	2.12	5.83	2.04	5.75	14.88	2.57	6.56	2.50	6.34	24.17
OVA44110	3.00	1.97	1.97	5.97	1.89	5.95	10.71	2.62	7.03	2.54	6.75	29.45
OVA44111	3.50	1.45	1.54	5.90	1.50	5.85	7.29	2.56	7.38	2.52	7.03	29.16
OVA44210	4.00	1.11	0.83	5.65	0.62	5.63	1.19	2.75	7.43	2.17	7.14	24.99
OVA44012	2.00	10.64	2.99	7.26	2.91	7.25	26.18	3.09	7.46	3.02	7.19	41.36
OVA44013	2.50	6.81	3.17	7.96	3.09	7.89	30.22	3.34	8.22	3.26	7.85	52.07
OVA44112	3.00	4.73	3.27	8.53	3.19	8.45	34.81	3.54	8.86	3.46	8.50	57.57
OVA44113	3.50	3.47	3.32	8.84	3.21	8.76	29.16	3.64	9.63	3.53	9.35	60.14
OVA44212	4.00	2.66	3.24	9.08	3.15	9.00	32.13	3.71	10.31	3.63	9.92	61.88
OVA44213	5.00	1.70	2.80	9.25	2.69	9.16	22.31	3.78	11.07	3.64	10.67	59.50
	6.00	1.18	1.75	8.88	1.72	8.84	10.71	3.61	11.89	3.56	11.48	64.26
OVA44014	2.00	22.24	3.72	0.91	3.54	0.97	42.55	3.65	8.35	3.49	8.58	61.88
OVA44015	2.50	14.23	4.12	0.90	3.89	0.99	52.53	3.99	9.68	3.80	9.58	75.77
OVA44114	3.00	9.88	4.41	0.91	4.17	1.01	58.24	4.28	10.78	4.07	10.32	89.03
OVA44115	3.50	7.26	4.60	0.92	4.36	1.00	64.69	4.53	11.75	4.32	11.15	104.78
OVA44214	4.00	5.56	4.73	0.92	4.48	1.01	64.26	4.76	12.39	4.54	11.67	109.49
OVA44215	5.00	3.56	4.83	0.94	4.58	1.01	59.50	5.02	13.86	4.79	12.97	130.17
	6.00	2.47	4.65	0.96	4.44	1.00	64.26	5.15	15.05	4.95	14.13	139.24
	7.00	1.82	4.21	0.98	3.96	1.00	54.67	5.25	15.96	4.97	15.02	131.21
	8.00	1.39	3.40	1.00	3.15	1.00	19.04	5.16	16.72	4.83	15.76	142.81
	9.00	1.10	1.67	1.00	1.39	1.00	0.00	5.21	17.40	4.41	16.56	120.50

The ideal choice for all applications

Multi-performance range to choose the required function just before installing the product

Autonomy can be selected: standard autonomy is 1 hour, but can be increased to 1.5, 2 or 3 hours depending on the project specifications. Each reference includes maintained/non-maintained function, selection can be done from jumper. Activa-link versions work with EcoStruxure Facility Expert Small Business providing remote monitoring and alarm notifications.



Up to
500
lumens



1. Install your luminaire



Each detail has been optimised with easy-to-drill and pre-cutted holes and 16 mm Ø tube inlet.

2. Choose your light level



Maintained mode (M/Always ON), Not-Maintained mode (NM/Only Emergency), selection can be done from jumper.



3 models cover 15 different performances. Autonomy can be selected: standard autonomy is 1 hour, but can be increased to 1.5, 2 or 3 hours depending on the project specifications.

3. Complete set of accessories

Exit Sign Accessories for both surface and ceiling installation


Vetosignal kit
Ref. OVA53230 - Right/Left
Ref. OVA53231 - Down/Down


Adhesive pictograms
Ref. OVA53229

Remote Controller

Compatible with Ref. OVA47019
Ref. OVA53161



Mounting Accessories for recessed and ceiling installations


Recessed mounting box
Ref. OVA53119


Frame
Ref. OVA53184


Fixing screws for recessed
box in the ceiling
Ref. OVA53131


Frame with
spring fixing
Ref. OVA53120

Gateway

TBS 150 PowerTag Link C+
For connecting Exiway Trend Activa-link
to the Facility Expert Small Business System
Ref. A9XELC10



4. Environment friendly



Battery LiFePO4

Increased energy efficiency, lower and
higher temperature tolerance. Does not
contain hazardous materials

High efficiency LEDs

No photobiological risk in
accordance with EN 62471
Risk Group Zero


Eco-compatible materials

The packaging is fully recyclable
and more than 40% of the plastic
parts are made of recycled material

5. Fast mounting



Quick fastener coupling reflector

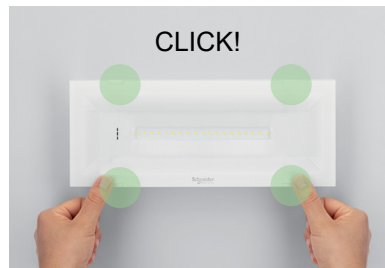


Quick screen fastener hooks

6. Choose exit sign accessories



Vetosignal kit with visibility
distance up to 25 m.
OVA53230, OVA53231 installed
on Exiway Trend IP65 provide an
IP65 Emergency Exit Sign.

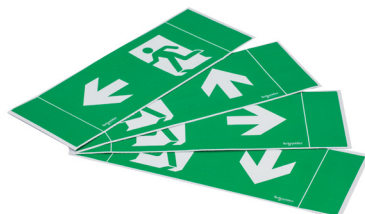

Adhesive pictograms with
visibility distance up to 20 m

Exiway Trend


IP42/IP65, IK08/IK09



Technical specifications

- Protection rating: IP42/IK08 and IP65/IK09
- Entry cable or tubes up to 16 mm Ø
- Standard, Activa and Activa-link models
- Activa-link compatible with PowerTag Link C+ (Ref. **A9XELC10**)
- Insulation Class II
- Compliant with EN 60598-2-22, EN 62471 Group RG0
- Installation even on flammable surface
- Working temperature 0° + 40°C
- Mains: 230 V 50-60Hz
- Batteries LiFePO4
- Maintained (M) and Non-Maintained (NM) function available from jumper position
- Activa and Activa-link models with maintained connector for remote switch (the jumper must remain in the Maintained position)
- Incandescent wire 850° C (60695-2-10)
- Self-extinguishing Polycarbonate 94 V-2 (UL94)
- Light source: Long life LED (up to 100,000 h)
- Multiple autonomies 1 h, 1.5 h, 2 h and 3 h selectable from a dedicated jumper
- Complete recharge 12 h
- Certification ENEC

Dimensions (mm)



CE

Flexible installation (surface and ceiling)

Recessed



Recessed for drywall



installation + optional frame



Exiway Trend		Protection rating	Autonomy (h)	Emergency flux (lm)	Maintained flux (lm)	Equivalent lamp power (W)	Consumption		Emergency condition (N.M)		Maintained mode (M)		LiFePO4 battery	Weight (kg)	Cat. no.
							(VA)	(W)	(VA)	(W)					
	Standard														
	IP42	IK08	1	110	70	19 x 0.3 W	11.5	0.4	11.1	0.8	3.2 V	0.57 Ah	0.34	OVA47010	
			1.5	90											
			2	70											
			3	50											
	IP65	IK09	1	110	70	19 x 0.3 W	11.5	0.4	11.1	0.8	3.2 V	0.57 Ah	0.35	OVA47011	
			1.5	90											
			2	70											
			3	50											
	IP42	IK08	1	250	150	19 x 0.3 W	24.3	1	23.9	1.9	3.2 V	1.5 Ah	0.36	OVA47012	
			1.5	200											
			2	150											
			3	120											
	IP65	IK09	1	250	150	19 x 0.3 W	24.3	1	23.9	1.9	3.2 V	1.5 Ah	0.37	OVA47013	
			1.5	200											
			2	150											
			3	120											
	IP42	IK08	1	500	230	25 x 0.3 W	24.2	1	23.5	2.3	6.4 V	1.5 Ah	0.41	OVA47014	
			1.5	400											
			2	300											
			3	250											
	IP65	IK09	1	500	230	25 x 0.3 W	24.2	1	23.5	2.3	6.4 V	1.5 Ah	0.42	OVA47015	
			1.5	400											
			2	300											
3			250												
Standard compatible with TBS Remote control 150															
IP65	IK09	1	250	150	19 x 0.3 W	24.3	1	23.9	1.9	3.2 V	1.5 Ah	0.37	OVA47019		
		1.5	200												
		2	150												
		3	120												
Activa															
	IP42	IK08	1	110	70	19 x 0.3 W	3.9	0.31	5	1.69	3.2 V	0.57 Ah	0.34	OVA47110	
			1.5	90											
			2	70											
			3	50											
	IP65	IK09	1	110	70	19 x 0.3 W	3.9	0.31	5	1.69	3.2 V	0.57 Ah	0.35	OVA47111	
			1.5	90											
			2	70											
			3	50											
	IP42	IK08	1	250	150	19 x 0.3 W	4.7	0.29	7.9	3.06	3.2 V	1.5 Ah	0.36	OVA47112	
			1.5	200											
			2	150											
			3	120											
	IP65	IK09	1	250	150	19 x 0.3 W	4.7	0.29	7.9	3.06	3.2 V	1.5 Ah	0.37	OVA47113	
			1.5	200											
			2	150											
			3	120											
	IP42	IK08	1	500	230	25 x 0.3 W	5.7	0.32	9.3	3.62	6.4 V	1.5 Ah	0.41	OVA47114	
			1.5	400											
			2	300											
			3	250											
	IP65	IK09	1	500	230	25 x 0.3 W	5.7	0.32	9.3	3.62	6.4 V	1.5 Ah	0.42	OVA47115	
			1.5	400											
			2	300											
			3	250											
Activa-link															
	IP42	IK08	1	110	70	19 x 0.3 W	3.9	0.31	5	1.69	3.2 V	0.57 Ah	0.34	OVA47210	
			1.5	90											
			2	70											
			3	50											
	IP65	IK08	1	110	70	19 x 0.3 W	3.9	0.31	5	1.69	3.2 V	0.57 Ah	0.35	OVA47211	
			1.5	90											
			2	70											
			3	50											
	IP42	IK08	1	250	150	19 x 0.3 W	4.7	0.29	7.9	3.06	3.2 V	1.5 Ah	0.36	OVA47212	
			1.5	200											
			2	150											
			3	120											
	IP65	IK08	1	250	150	19 x 0.3 W	4.7	0.29	7.9	3.06	3.2 V	1.5 Ah	0.37	OVA47213	
			1.5	200											
			2	150											
			3	120											
	IP42														

Accessory catalogue numbers

	Compatibility	Dimensions (mm) height x width x depth	Cat. no.
Recessed mounting box 	All	282 x 106 x 39	OVA53119
Aesthetic frame for surface installation 	All	-	OVA53184
Fixing screws for recessed box in the ceiling 	All	-	OVA53131
Frame with spring fixing for false ceiling installation 	All	157 x 343	OVA53120
TBS Remote control - 150 luminaires 	OVA47019	90 x 85 x 69, 5 mm	OVA53161
Vetrosignal kit Left/Right (25 m) 	All	-	OVA53230
Vetrosignal kit Down/Down (25 m) 	All	-	OVA53231
Set of 4 adhesive pictograms (20 m) for surface installations 	All	-	OVA53229

Spare parts catalogue numbers

	Description	Compatibility	Cat. no.
Batteries (LiFePO4) 	3.2 V, 0.57 Ah	OVA47010, OVA47011, OVA47110, OVA47111, OVA47210, OVA47211	OVA51170
	3.2 V, 1.5 Ah	OVA47012, OVA47013, OVA47019, OVA47112, OVA47113, OVA47212, OVA47213	OVA51168
	6.4 V, 1.5 Ah	OVA47014, OVA47015, OVA47114, OVA47115, OVA47214, OVA47215	OVA51172

PowerTag Link C+

For the connection of Exiway Light Activa-link to the APP Facility Expert Small Business.





A9XELC10

Exiway Trend

Emergency lighting spacing table

Exiway Trend (Standard, Activa and Activa-link)





A and E: Transverse spacing to wall
B and F: Transverse spacing between luminaires
C and G: Axial spacing to wall
D and H: Axial spacing between luminaires

Catalog number	Installation height for ceiling mounting	Lux level directly under luminaires	Escape routes 1 Lux min. Along centre line				Area covered to obtain more than 1 Lux on the ground	Open (Anti-Panic) areas 0.5 Lux min. Luminaires arranged in a regular array				Area covered to obtain 0.5 Lux on the ground
Autonomy 1 h	(m)	(lux)	A (m)	B	C	D	(m²)	E (m)	F	G	H	(m²)
OVA47010	2.00	9.65	2.83	6.53	2.78	6.76	24.99	2.85	6.42	2.81	6.84	35.11
OVA47011	2.50	6.18	3.01	7.38	2.98	7.52	26.50	3.11	7.28	3.08	7.40	41.84
OVA47110	3.00	4.29	3.05	8.00	2.95	8.11	27.45	3.34	8.18	3.24	8.00	52.21
OVA47111	3.50	3.15	3.02	8.31	2.96	8.45	29.16	3.42	9.01	3.37	8.74	51.94
OVA47210	4.00	2.41	2.85	8.32	2.80	8.43	23.80	3.43	9.73	3.38	9.46	58.31
OVA47211	5.00	1.54	2.38	8.32	2.28	8.39	22.31	3.45	10.75	3.32	10.56	59.50
	6.00	1.07	1.11	7.76	1.11	7.83	2.68	3.18	11.18	3.18	10.70	42.84
OVA47012	2.00	22.26	3.50	10.18	3.50	8.93	36.89	3.37	9.33	3.37	7.78	64.26
OVA47013	2.50	14.25	3.92	10.14	3.85	9.71	46.49	3.72	10.44	3.66	8.49	72.99
OVA47019	3.00	9.89	4.21	9.85	4.13	10.24	54.22	4.03	9.68	3.96	10.13	78.99
OVA47112	3.50	7.27	4.44	10.69	4.36	10.88	60.14	4.27	10.58	4.21	10.82	92.03
OVA47113	4.00	5.57	4.56	11.33	4.44	11.53	61.88	4.48	11.60	4.38	11.50	101.16
OVA47212	5.00	3.56	4.62	12.24	4.50	12.46	59.50	4.81	13.15	4.69	12.80	120.87
OVA47213	6.00	2.47	4.48	12.60	4.32	12.81	64.26	4.93	14.42	4.77	14.06	131.21
	7.00	1.82	4.16	12.78	4.04	12.89	51.02	4.98	15.50	4.85	15.12	116.63
	8.00	1.39	3.48	12.62	3.27	12.67	19.04	4.97	16.31	4.71	15.78	128.53
	9.00	1.10	2.00	12.09	1.83	12.14	24.10	4.85	16.84	4.49	16.30	96.40
OVA47014	2.00	45.38	5.28	11.67	4.29	10.42	62.78	5.01	6.86	4.16	6.15	91.93
OVA47015	2.50	29.04	4.65	13.43	4.70	11.50	72.52	4.40	12.10	4.44	10.36	112.50
OVA47114	3.00	20.17	5.14	13.08	5.04	12.44	79.66	4.75	13.82	4.67	11.32	122.50
OVA47115	3.50	14.82	5.55	14.19	5.39	13.23	92.03	5.12	14.88	4.99	11.85	143.05
OVA47214	4.00	11.34	5.82	13.46	5.71	14.07	102.35	5.40	14.62	5.30	11.78	146.38
OVA47215	5.00	7.26	6.29	15.12	6.17	15.40	119.01	5.89	15.24	5.79	15.30	187.81
	6.00	5.04	6.55	16.37	6.38	16.67	133.88	6.31	17.12	6.16	16.69	211.54
	7.00	3.70	6.64	17.22	6.41	17.52	116.63	6.61	18.50	6.40	17.88	236.90
	8.00	2.84	6.59	17.78	6.36	18.09	138.05	6.78	19.69	6.56	19.23	247.54
	9.00	2.24	6.36	18.09	6.13	18.24	108.45	6.87	20.90	6.64	20.24	265.09
	10.00	1.82	6.01	18.25	5.77	18.25	104.13	6.94	21.84	6.68	21.35	238.02
Autonomy 1.5 h	(m)	(lux)	A (m)	B	C	D	(m²)	E (m)	F	G	H	(m²)
OVA47010	2.00	7.90	2.65	6.29	2.63	6.43	22.02	2.73	6.14	2.71	6.46	32.73
OVA47011	2.50	5.06	2.78	7.04	2.68	7.14	23.71	3.00	7.06	2.91	6.89	39.51
OVA47110	3.00	3.51	2.73	7.48	2.68	7.61	21.42	3.14	7.92	3.10	7.66	44.18
OVA47111	3.50	2.58	2.59	7.55	2.52	7.71	20.96	3.17	8.68	3.09	8.50	47.38
OVA47210	4.00	1.98	2.48	7.53	2.43	7.59	19.04	3.14	9.24	3.09	9.06	38.08
OVA47211	5.00	1.26	1.77	7.07	1.58	7.13	7.44	3.11	10.21	2.83	9.76	40.91
OVA47012	2.00	17.87	3.33	8.52	3.26	8.39	33.92	3.19	9.01	3.13	7.25	52.66
OVA47013	2.50	11.44	3.67	8.46	3.57	8.93	40.44	3.54	9.74	3.46	7.79	58.57
OVA47019	3.00	7.94	3.91	9.34	3.81	9.65	47.53	3.81	9.38	3.72	9.59	70.29
OVA47112	3.50	5.84	4.10	10.10	3.92	10.23	49.20	4.08	10.19	3.92	10.09	79.27
OVA47113	4.00	4.47	4.11	10.62	3.97	10.81	52.36	4.22	11.04	4.09	10.73	90.45
OVA47212	5.00	2.86	4.12	11.21	3.91	11.36	52.07	4.46	12.49	4.25	12.04	96.69
OVA47213	6.00	1.99	3.79	11.39	3.68	11.49	42.84	4.44	13.57	4.33	13.11	99.07
	7.00	1.46	3.15	11.29	3.01	11.39	29.16	4.42	14.47	4.24	13.74	105.69
	8.00	1.12	1.81	10.74	1.70	10.79	19.04	4.29	14.94	4.06	14.33	76.17
OVA47014	2.00	36.29	3.88	11.19	4.01	9.78	50.28	3.86	8.22	3.97	7.19	82.41
OVA47015	2.50	23.22	4.42	12.72	4.37	10.72	59.50	4.18	11.72	4.15	9.80	100.41
OVA47114	3.00	16.13	4.85	12.44	4.75	11.65	70.96	4.53	13.15	4.45	10.57	110.45
OVA47115	3.50	11.85	5.14	11.90	5.05	12.44	79.27	4.83	13.06	4.75	10.49	117.54
OVA47214	4.00	9.07	5.41	12.76	5.31	13.18	89.26	5.11	12.61	5.03	12.92	135.67
OVA47215	5.00	5.81	5.75	14.29	5.65	14.48	96.69	5.55	14.70	5.46	14.45	159.92
	6.00	4.03	5.90	15.23	5.74	15.57	96.40	5.86	16.22	5.72	15.81	182.08
	7.00	2.96	5.87	15.76	5.67	16.18	112.98	6.09	17.41	5.90	16.99	189.52
	8.00	2.27	5.65	16.08	5.45	16.21	90.45	6.16	18.65	5.95	18.22	209.45
	9.00	1.79	5.30	16.21	5.14	16.28	84.35	6.21	19.56	6.04	19.12	192.79
	10.00	1.45	4.61	16.13	4.40	16.20	74.38	6.20	20.36	5.94	19.90	215.70

Exiway Trend


Emergency lighting spacing table

Exiway Trend (Standard, Activa and Activa-link)



A and E: Transverse spacing to wall
B and F: Transverse spacing between luminaires
C and G: Axial spacing to wall
D and H: Axial spacing between luminaires

Catalog number	Installation height for ceiling mounting	Lux level directly under luminaires	Escape routes 1 Lux min. Along centre line				Area covered to obtain more than 1 Lux on the ground	Open (Anti-Panic) areas 0.5 Lux min. Luminaires arranged in a regular array				Area covered to obtain 0.5 Lux on the ground
Autonomy 2 h	(m)	(lux)	A (m)	B	C	D	(m²)	E (m)	F	G	H	(m²)
OVA47010	2.00	6.13	2.43	5.90	2.43	6.04	17.26	2.60	5.86	2.60	5.88	26.78
OVA47011	2.50	3.92	2.37	6.52	2.33	6.64	14.88	2.80	6.67	2.76	6.50	34.40
OVA47110	3.00	2.72	2.26	6.70	2.22	6.81	16.07	2.84	7.54	2.79	7.37	34.81
OVA47111	3.50	2.00	2.17	6.59	2.14	6.64	14.58	2.80	8.09	2.78	7.99	29.16
OVA47210	4.00	1.53	1.82	6.42	1.72	6.57	11.90	2.84	8.55	2.70	8.45	35.70
OVA47012	2.00	13.09	3.05	7.93	3.02	7.56	27.67	3.04	8.32	3.01	6.86	44.63
OVA47013	2.50	8.38	3.35	7.93	3.32	8.16	34.87	3.31	7.80	3.29	8.23	51.60
OVA47019	3.00	5.82	3.51	8.69	3.45	8.90	36.15	3.58	8.77	3.53	8.76	58.91
OVA47112	3.50	4.27	3.53	9.29	3.47	9.42	37.36	3.78	9.61	3.73	9.41	70.16
OVA47113	4.00	3.27	3.54	9.58	3.48	9.79	38.08	3.90	10.34	3.84	10.14	71.41
OVA47212	5.00	2.09	3.31	9.79	3.22	9.91	29.75	3.93	11.64	3.84	11.44	76.24
OVA47213	6.00	1.45	2.70	9.72	2.61	9.85	29.45	3.90	12.52	3.79	12.20	77.65
	7.00	1.07	1.39	9.18	1.23	9.22	10.93	3.87	13.07	3.49	12.74	58.31
OVA47014	2.00	27.07	3.65	10.66	3.68	8.98	43.74	3.59	9.72	3.62	8.20	69.92
OVA47015	2.50	17.33	4.12	10.54	4.08	9.92	51.60	3.91	11.27	3.88	9.14	77.63
OVA47114	3.00	12.03	4.45	10.35	4.37	10.77	58.91	4.25	11.51	4.18	9.11	87.69
OVA47115	3.50	8.84	4.69	11.16	4.64	11.48	67.43	4.52	11.20	4.48	11.34	102.96
OVA47214	4.00	6.77	4.90	11.93	4.85	12.14	70.21	4.75	12.04	4.71	12.07	110.68
OVA47215	5.00	4.33	5.09	13.04	4.96	13.27	78.10	5.13	13.69	5.01	13.46	137.60
	6.00	3.01	5.08	13.63	4.95	13.99	85.69	5.32	15.11	5.19	14.73	139.24
	7.00	2.21	4.81	13.95	4.72	14.06	58.31	5.37	16.34	5.28	16.09	160.36
	8.00	1.69	4.48	14.04	4.30	14.09	57.12	5.47	17.16	5.27	16.90	152.33
	9.00	1.34	3.68	13.82	3.50	13.81	24.10	5.37	17.99	5.13	17.42	144.60
	10.00	1.08	2.17	13.24	2.03	13.36	29.75	5.24	18.49	4.94	17.91	119.01
Autonomy 3 h	(m)	(lux)	A (m)	B	C	D	(m²)	E (m)	F	G	H	(m²)
OVA47010	2.00	4.13	1.98	5.48	1.93	5.56	11.90	2.44	5.43	2.39	5.33	23.50
OVA47011	2.50	2.64	1.87	5.70	1.82	5.80	10.69	2.51	6.31	2.45	6.21	26.03
OVA47110	3.00	1.83	1.78	5.52	1.77	5.50	9.37	2.42	6.92	2.40	6.82	21.42
OVA47111	3.50	1.35	1.40	5.11	1.34	5.23	3.64	2.30	7.49	2.23	7.26	21.87
OVA47210	4.00	1.03	0.16	5.00	0.19	5.05	0.00	2.08	7.25	2.43	6.96	19.04
OVA47012	2.00	10.44	2.88	6.70	2.83	7.00	25.29	2.90	7.23	2.85	5.99	36.00
OVA47013	2.50	6.68	3.11	7.56	3.06	7.70	29.75	3.17	7.54	3.12	7.60	45.09
OVA47019	3.00	4.64	3.16	8.18	3.08	8.34	32.13	3.40	8.38	3.33	8.19	53.55
OVA47112	3.50	3.41	3.15	8.61	3.07	8.72	29.16	3.54	9.08	3.46	8.89	58.31
OVA47113	4.00	2.61	3.07	8.73	2.96	8.85	28.56	3.56	9.94	3.45	9.66	61.88
OVA47212	5.00	1.67	2.74	8.73	2.63	8.81	22.31	3.58	11.01	3.46	10.72	59.50
OVA47213	6.00	1.16	1.55	8.25	1.50	8.29	10.71	3.39	11.66	3.28	11.26	50.88
OVA47014	2.00	22.77	3.50	10.11	3.50	8.58	36.89	3.47	9.42	3.47	7.98	62.18
OVA47015	2.50	14.57	3.92	9.91	3.85	9.40	46.49	3.82	10.50	3.76	8.45	69.73
OVA47114	3.00	10.12	4.21	9.90	4.17	10.19	54.89	4.08	9.79	4.05	10.02	80.33
OVA47115	3.50	7.44	4.44	10.68	4.40	10.88	60.14	4.33	10.72	4.29	10.85	92.94
OVA47214	4.00	5.69	4.60	11.38	4.52	11.59	61.88	4.54	11.60	4.47	11.50	102.35
OVA47215	5.00	3.64	4.62	12.24	4.54	12.57	59.50	4.83	13.15	4.75	12.80	122.73
	6.00	2.53	4.52	12.71	4.36	12.81	64.26	4.97	14.47	4.81	14.23	133.88
	7.00	1.86	4.21	12.83	4.12	12.83	54.67	5.00	15.54	4.91	15.30	116.63
	8.00	1.42	3.52	12.62	3.35	12.73	28.56	4.98	16.43	4.77	16.04	133.29
	9.00	1.12	2.24	12.14	2.08	12.20	24.10	4.87	16.94	4.55	16.40	96.40

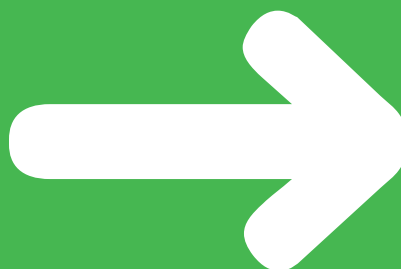

OVA4401●

OVA44010	8, 10, 11
OVA44011	8, 10, 11
OVA44012	8, 10, 11
OVA44013	8, 10, 11
OVA44014	8, 10, 11
OVA44015	8, 10, 11

OVA4411●

OVA44110	8, 10, 11
OVA44111	8, 10, 11
OVA44112	8, 10, 11
OVA44113	8, 10, 11
OVA44114	8, 10, 11
OVA44115	8, 10, 11

OVA4421●

OVA44210	8, 10, 11
OVA44211	8, 10, 11
OVA44212	8, 10, 11
OVA44213	8, 10, 11
OVA44214	8, 10, 11
OVA44215	8, 10, 11

OVA4701●

OVA47010	16, 18, 19
OVA47011	16, 18, 19
OVA47012	16, 18, 19
OVA47013	16, 18, 19
OVA47014	16, 18, 19
OVA47015	16, 18, 19
OVA47019	16, 18, 19

OVA4711●

OVA47110	16, 18, 19
OVA47111	16, 18, 19
OVA47112	16, 18, 19
OVA47113	16, 18, 19
OVA47114	16, 18, 19
OVA47115	16, 18, 19

OVA4721●

OVA47210	16, 18, 19
OVA47211	16, 18, 19
OVA47212	16, 18, 19
OVA47213	16, 18, 19
OVA47214	16, 18, 19
OVA47215	16, 18, 19

OVA511●●

OVA51168	9, 17
OVA51170	9, 17
OVA51172	9, 17

OVA531●●

OVA53119	17
OVA53120	17
OVA53131	17
OVA53161	17
OVA53184	17

OVA532●●

OVA53214	9
OVA53215	9
OVA53216	9
OVA53226	9
OVA53227	9
OVA53229	17
OVA53230	17
OVA53231	17

OVA598●●

OVA59824	9
----------	---



Schneider Electric Industries SAS

35, rue Joseph Monier
CS 30323
92506 Rueil Malmaison Cedex
France

RCS Nanterre 954 503 439
Capital social 896 313 776 €
www.se.com

09-2022
LSB03200EN

©2022 - Schneider Electric. All Rights Reserved.
All trademarks are owned by Schneider Electric Industries SAS or its affiliated companies.

This document has been
printed on recycled paper

