


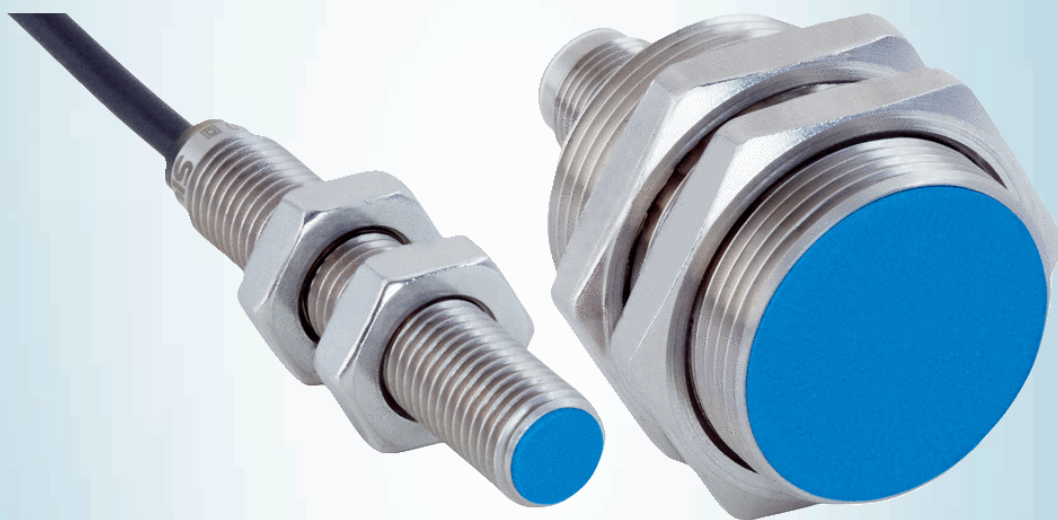

IMS

Rugged sensors for use in mobile machines

SICK
Sensor Intelligence.

Advantages



Maximum operating times of your machine

Mobile machines can be used in any weather. Impacts and vibrations as well as rain, snow, frost, dirt, oil residues, cold or heat heavily impact the sensors installed in the machines. Other factors are aggressive machine cleaning processes. IMF inductive proximity sensors master these challenges with their tight and rugged design. The IP68 and IP69K enclosure ratings, high impact and vibration resistance as well as wide specification limits enable maximum operating times for your machine.



Winter in Siberia: -40 °C. While others freeze, the IMS works perfectly



Grain fields in summer: Even at very high temperatures, the IMS shows no weakness



The very tight IMS housing withstands regular high-pressure cleaning without any problems



Ready for use in any weather



Stable and fault-free processes: The more stable and fault-free the processes, the higher the throughput.

The IMS inductive proximity sensors demonstrate high compatibility with electromagnetic faults up to 100 V/m, thereby tolerating even motor vehicle electrical system pulses effortlessly. This compatibility, combined with the high-precision SICK ASIC technology, ensures optimal functionality of the mobile machines.



High resistance against electromagnetic faults



High-precision processes, high throughput




Extensive portfolio with application-specific special variants

The IMS inductive proximity sensors from SICK cover a large range of relevant industry applications. Even in the event of specific customer requirements, SICK offers quick, uncomplicated tailored sensor solutions.




Implementation of mobile plug connectors common in the industry

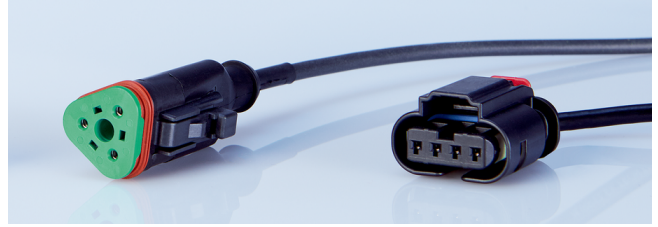

Tailored solutions



With specific variants, IMS sensors cover a large range of relevant industry applications.



Technical data overview

Housing	Cylindrical thread design
Thread size	M12 x 1 M18 x 1 M30 x 1.5
Diameter	Ø 12 mm ... Ø 30 mm (depending on type)
Sensing range S_n	4 mm ... 20 mm (depending on type)
Housing material	Stainless steel V2A Stainless steel V4A Brass (depending on type)
Enclosure rating	IP68, IP69K

Product description

The IMS inductive proximity sensors combine tried-and-tested, rugged SICK mechanics with advanced electronics. With the E1 type approval by the German Federal Motor Transport Authority, the sensors are especially well-suited for use in mobile machines. The IMS products feature protection against load dump, electromagnetic compatibility and a large voltage range of 7.2 V to 60 V DC. Versions with connecting cables offer enough hold for mobile male connectors due to the oil-resistant material and a 0.5 mm² cross section of these cables. The ambient temperature range is from -40 °C to +100 °C, thereby enabling sensor function in any weather.

At a glance

- Thread sizes: M12 to M30
- Large sensing ranges: 4 mm to 20 mm
- Electrical configuration: DC, 3-wire
- Enclosure rating: IP68, IP69K
- Ambient temperature: -40 °C to +100 °C
- Rugged stainless-steel housing; plastic sensing face
- Load dump protection and high electromagnetic compatibility of 100 V/m
- E1 type approval

Your benefits

- Maximum operating times due to rugged sensor technology, even in harsh environments that are subjected to severe weather conditions
- Stable and fault-free processes thanks to high electromagnetic compatibility and very precise detection
- Extensive portfolio with application-specific special variants
- Worldwide availability due to global SICK sales network and countless approvals

Fields of application

- Detection and positioning tasks in balers
- Monitoring of belt speed in harvesters
- Detection of ring mount position in excavators
- Monitoring of loading area position in dump trucks
- Detection of aerial ladder end position in fire trucks
- Positioning of drums in garbage trucks
- Detection tasks in aircraft tractors

Ordering information

Other models and accessories → www.sick.com/IMS

- **Sub product family:** IMS12
- **Cylindrical thread design:** M12
- **Installation type:** flush
- **Electrical wiring:** DC 3-wire
- **Sensing range S_n :** 4 mm
- **Housing:** Standard design

Switching output	Output function	Special features	Connection type	Type	Part no.
NPN	NC	Resistant against coolant lubricants, Temperature resistance	Cable, 3-wire, 2 m	IMS12-04BNOVU2S	1097643
			Male connector M12, 4-pin ¹⁾	IMS12-04BNOVCOS	1097639
		Resistant to cleaning agents, Temperature resistance	Cable, 3-wire, 2 m	IMS12-04BNONU2S	1103206
			Male connector M12, 4-pin ¹⁾	IMS12-04BNONCOS	1103202
	NO	Resistant against coolant lubricants, Temperature resistance	Cable, 3-wire, 2 m	IMS12-04BNSVU2S	1097580
			Cable, 3-wire, 4 m	IMS12-04BNSVU4S	1112289
		Resistant to cleaning agents, Temperature resistance	Male connector M12, 4-pin ¹⁾	IMS12-04BNSVCOS	1097576
			Cable, 3-wire, 2 m	IMS12-04BNSNU2S	1103182
PNP	NC	Resistant against coolant lubricants, Temperature resistance	Cable, 3-wire, 2 m	IMS12-04BP0VU2S	1097642
			Male connector M12, 4-pin ¹⁾	IMS12-04BP0VCOS	1097638
		Resistant to cleaning agents, Temperature resistance	Cable, 3-wire, 2 m	IMS12-04BPONU2S	1103205
			Male connector M12, 4-pin ¹⁾	IMS12-04BPONCOS	1103201
	NO	Resistant against coolant lubricants, Temperature resistance	Cable with Deutsch DT04-3P-E004 male connector, 3-pin, 0.3 m	IMS12-04BPSVUDSS01	1131899
			Cable, 3-wire, 2 m	IMS12-04BPSVU2S	1097579
			Male connector M12, 4-pin ¹⁾	IMS12-04BPSVCOS	1097575
		Resistant to cleaning agents, Temperature resistance	Cable, 3-wire, 2 m	IMS12-04BPSNU2S	1103181
			Male connector M12, 4-pin ¹⁾	IMS12-04BPSNCOS	1103177

¹⁾ With gold plated contact pins.

- **Sub product family:** IMS12
- **Cylindrical thread design:** M12
- **Installation type:** non-flush
- **Electrical wiring:** DC 3-wire
- **Sensing range S_n :** 8 mm
- **Housing:** Standard design

Switching output	Output function	Special features	Connection type	Type	Part no.
NPN	NC	Resistant against coolant lubricants, Temperature resistance	Cable, 3-wire, 2 m	IMS12-08NNOVU2S	1097645
			Male connector M12, 4-pin ¹⁾	IMS12-08NNOVCO5	1097641
		Resistant to cleaning agents, Temperature resistance	Cable, 3-wire, 2 m	IMS12-08NNONU2S	1103208
			Male connector M12, 4-pin ¹⁾	IMS12-08NNONCO5	1103204
	NO	Resistant against coolant lubricants, Temperature resistance	Cable, 3-wire, 2 m	IMS12-08NNSVU2S	1097582
			Male connector M12, 4-pin ¹⁾	IMS12-08NNSVCO5	1097578
		Resistant to cleaning agents, Temperature resistance	Cable, 3-wire, 2 m	IMS12-08NNSNU2S	1103184
			Male connector M12, 4-pin ¹⁾	IMS12-08NNSNCO5	1103180
PNP	NC	Resistant against coolant lubricants, Temperature resistance	Cable, 3-wire, 2 m	IMS12-08NPOVU2S	1097644
			Male connector M12, 4-pin ¹⁾	IMS12-08NPOVCO5	1097640
		Resistant to cleaning agents, Temperature resistance	Cable, 3-wire, 2 m	IMS12-08NPONU2S	1103207
			Male connector M12, 4-pin ¹⁾	IMS12-08NPONCO5	1103203
	NO	Resistant against coolant lubricants, Temperature resistance	Cable, 3-wire, 2 m	IMS12-08NPSVU2S	1097581
			Male connector M12, 4-pin ¹⁾	IMS12-08NPSVCO5	1097577
		Resistant to cleaning agents, Temperature resistance	Cable, 3-wire, 2 m	IMS12-08NPSNU2S	1103183
			Male connector M12, 4-pin ¹⁾	IMS12-08NPSNCO5	1103179

¹⁾ With gold plated contact pins.

- **Sub product family:** IMS18
- **Cylindrical thread design:** M18
- **Installation type:** quasi-flush
- **Electrical wiring:** DC 3-wire
- **Sensing range S_n :** 8 mm
- **Housing:** Standard design

Switching output	Output function	Special features	Connection type	Type	Part no.
NPN	NC	Resistant against coolant lubricants, Temperature resistance	Cable, 3-wire, 2 m	IMS18-08BNOVU2S	1097651
			Male connector M12, 4-pin ¹⁾	IMS18-08BNOVCOS	1097647
		Resistant to cleaning agents, Temperature resistance	Cable, 3-wire, 2 m	IMS18-08BNONU2S	1103214
			Male connector M12, 4-pin ¹⁾	IMS18-08BNONCOS	1103210
	NO	Resistant against coolant lubricants, Temperature resistance	Cable, 3-wire, 2 m	IMS18-08BNSVU2S	1097588
			Male connector M12, 4-pin ¹⁾	IMS18-08BNSVCOS	1097584
		Resistant to cleaning agents, Temperature resistance	Cable, 3-wire, 2 m	IMS18-08BNSNU2S	1103190
			Male connector M12, 4-pin ¹⁾	IMS18-08BNSNCOS	1103186
PNP	NC	Resistant against coolant lubricants, Temperature resistance	Cable, 3-wire, 2 m	IMS18-08BPOVU2S	1097650
			Male connector M12, 4-pin ¹⁾	IMS18-08BPOVCOS	1097646
		Resistant to cleaning agents, Temperature resistance	Cable, 3-wire, 2 m	IMS18-08BPONU2S	1103213
			Male connector M12, 4-pin ¹⁾	IMS18-08BPONCOS	1103209
	NO	Resistant against coolant lubricants, Temperature resistance	Cable, 3-wire, 2 m	IMS18-08BPSVU2S	1097587
			Male connector M12, 4-pin ¹⁾	IMS18-08BPSVCOS	1097583
		Resistant to cleaning agents, Temperature resistance	Cable, 3-wire, 2 m	IMS18-08BPSNU2S	1103189
			Male connector M12, 4-pin ¹⁾	IMS18-08BPSNCOS	1103185

¹⁾ With gold plated contact pins.

- **Sub product family:** IMS18
- **Cylindrical thread design:** M18
- **Installation type:** flush
- **Electrical wiring:** DC 3-wire
- **Sensing range S_n :** 8 mm
- **Housing:** Standard design

Switching output	Output function	Special features	Connection type	Type	Part no.
PNP	NO	Resistant against coolant lubricants, Temperature resistance	Male connector M12, 4-pin ¹⁾	IMS18-08BPSZC0SS03	1112343

¹⁾ With gold plated contact pins.

- **Sub product family:** IMS18
- **Cylindrical thread design:** M18
- **Installation type:** non-flush
- **Electrical wiring:** DC 3-wire
- **Sensing range S_n :** 12 mm
- **Housing:** Standard design

Switching output	Output function	Special features	Connection type	Type	Part no.
NPN	NC	Resistant against coolant lubricants, Temperature resistance	Cable, 3-wire, 2 m	IMS18-12NNOVU2S	1097653
			Male connector M12, 4-pin ¹⁾	IMS18-12NNOVC0S	1097649
		Resistant to cleaning agents, Temperature resistance	Cable, 3-wire, 2 m	IMS18-12NNONU2S	1103216
			Male connector M12, 4-pin ¹⁾	IMS18-12NNONC0S	1103212
	NO	Resistant against coolant lubricants, Temperature resistance	Cable, 3-wire, 2 m	IMS18-12NNSVU2S	1097590
			Male connector M12, 4-pin ¹⁾	IMS18-12NNSVC0S	1097586
		Resistant to cleaning agents, Temperature resistance	Cable, 3-wire, 2 m	IMS18-12NNSNU2S	1103192
			Male connector M12, 4-pin ¹⁾	IMS18-12NNSNC0S	1103188
PNP	NC	Resistant against coolant lubricants, Temperature resistance	Cable, 3-wire, 2 m	IMS18-12NPOVU2S	1097652
			Male connector M12, 4-pin ¹⁾	IMS18-12NPOVC0S	1097648
		Resistant to cleaning agents, Temperature resistance	Cable, 3-wire, 2 m	IMS18-12NPONU2S	1103215
			Male connector M12, 4-pin ¹⁾	IMS18-12NPONC0S	1103211
	NO	Resistant against coolant lubricants, Temperature resistance	Cable, 3-wire, 2 m	IMS18-12NPSVU2S	1097589
			Male connector M12, 4-pin ¹⁾	IMS18-12NPSVC0S	1097585
		Resistant to cleaning agents, Temperature resistance	Cable, 3-wire, 2 m	IMS18-12NPSNU2S	1103191
			Male connector M12, 4-pin ¹⁾	IMS18-12NPSNC0S	1103187

¹⁾ With gold plated contact pins.

- **Sub product family:** IMS30
- **Cylindrical thread design:** M30
- **Installation type:** flush
- **Electrical wiring:** DC 3-wire
- **Sensing range S_n :** 15 mm
- **Housing:** Standard design

Switching output	Output function	Special features	Connection type	Type	Part no.
NPN	NC	Resistant against coolant lubricants, Temperature resistance	Cable, 3-wire, 2 m	IMS30-15BNOVU2S	1097659
			Male connector M12, 4-pin ¹⁾	IMS30-15BNOVCOS	1097655
		Resistant to cleaning agents, Temperature resistance	Cable, 3-wire, 2 m	IMS30-15BNONU2S	1103222
			Male connector M12, 4-pin ¹⁾	IMS30-15BNONCOS	1103218
	NO	Resistant against coolant lubricants, Temperature resistance	Cable, 3-wire, 2 m	IMS30-15BNSVU2S	1097596
			Male connector M12, 4-pin ¹⁾	IMS30-15BNSVCOS	1097592
		Resistant to cleaning agents, Temperature resistance	Cable, 3-wire, 2 m	IMS30-15BNSNU2S	1103198
			Male connector M12, 4-pin ¹⁾	IMS30-15BNSNCOS	1103194
PNP	NC	Resistant against coolant lubricants, Temperature resistance	Cable, 3-wire, 2 m	IMS30-15BPOVU2S	1097658
			Male connector M12, 4-pin ¹⁾	IMS30-15BPOVCOS	1097654
		Resistant to cleaning agents, Temperature resistance	Cable, 3-wire, 2 m	IMS30-15BPONU2S	1103221
			Male connector M12, 4-pin ¹⁾	IMS30-15BPONCOS	1103217
	NO	Resistant against coolant lubricants, Temperature resistance	Cable, 3-wire, 2 m	IMS30-15BPSVU2S	1097595
			Cable, 3-wire, 4 m	IMS30-15BPSVU4S	1118941
			Male connector M12, 4-pin ¹⁾	IMS30-15BPSVCOS	1097591
		Resistant to cleaning agents, Temperature resistance	Cable, 3-wire, 2 m	IMS30-15BPSNU2S	1103197
			Male connector M12, 4-pin ¹⁾	IMS30-15BPSNCOS	1103193

¹⁾ With gold plated contact pins.

- **Sub product family:** IMS30
- **Cylindrical thread design:** M30
- **Installation type:** non-flush
- **Electrical wiring:** DC 3-wire
- **Sensing range S_n :** 20 mm
- **Housing:** Standard design

Switching output	Output function	Special features	Connection type	Type	Part no.
NPN	NC	Resistant against coolant lubricants, Temperature resistance	Cable, 3-wire, 2 m	IMS30-20NNOVU2S	1097661
			Male connector M12, 4-pin ¹⁾	IMS30-20NNOVC0S	1097657
		Resistant to cleaning agents, Temperature resistance	Cable, 3-wire, 2 m	IMS30-20NNONU2S	1103224
			Male connector M12, 4-pin ¹⁾	IMS30-20NNONC0S	1103220
	NO	Resistant against coolant lubricants, Temperature resistance	Cable, 3-wire, 2 m	IMS30-20NNSVU2S	1097598
			Male connector M12, 4-pin ¹⁾	IMS30-20NNSVC0S	1097594
		Resistant to cleaning agents, Temperature resistance	Cable, 3-wire, 2 m	IMS30-20NNSNU2S	1103200
			Male connector M12, 4-pin ¹⁾	IMS30-20NNSNC0S	1103196
PNP	NC	Resistant against coolant lubricants, Temperature resistance	Cable, 3-wire, 2 m	IMS30-20NPOVU2S	1097660
			Male connector M12, 4-pin ¹⁾	IMS30-20NPOVC0S	1097656
		Resistant to cleaning agents, Temperature resistance	Cable, 3-wire, 2 m	IMS30-20NPONU2S	1103223
			Male connector M12, 4-pin ¹⁾	IMS30-20NPONC0S	1103219
	NO	Resistant against coolant lubricants, Temperature resistance	Cable, 3-wire, 2 m	IMS30-20NPSVU2S	1097597
			Male connector M12, 4-pin ¹⁾	IMS30-20NPSVC0S	1097593
		Resistant to cleaning agents, Temperature resistance	Cable, 3-wire, 2 m	IMS30-20NPSNU2S	1103199
			Male connector M12, 4-pin ¹⁾	IMS30-20NPSNC0S	1103195

¹⁾ With gold plated contact pins.

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com