

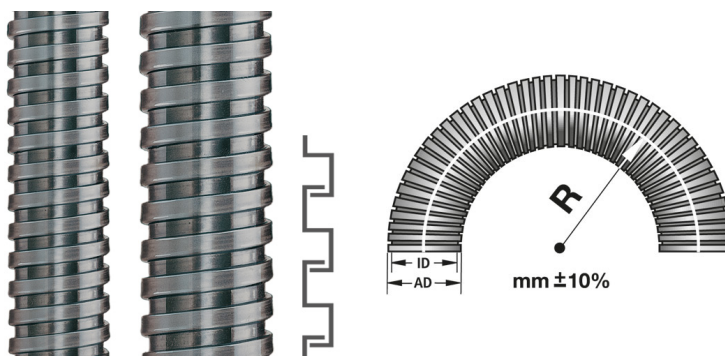
SPR

Protective metal conduits

Protective metal conduit, strip-wound, s profile

Temperature: -50°C ... +250°C

Material: galvanized steel

Protection class [acc. to EN 60529]: IP0


FLEXA No.	Colour	DI [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
11010101003	Metallic	3,0	4,9	10	25	0,037	50
11010101004	Metallic	4,0	6,0	12	30	0,038	50
11010101005	Metallic	4,8	7,0	19	45	0,046	50
11010101006	Metallic	6,0	8,0	20	50	0,048	50
11010101007	Metallic	7,0	9,3	25	65	0,052	50
11010101009	Metallic	9,0	11,0	30	75	0,068	50
11010101010	Metallic	10,0	13,0	32	80	0,090	50

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.