4xWDU + 1WPE 4,0mm² - 4xM20



code: 644.0345-J01

TECHNICAL CHARACTERISTICS	
Ex Protection type:	Ex eb IIC T6 Gb Ex tb IIIC T80°C Db - IP66
Operating temperature range:	-30°C ≤Ta ≤+40°C
Maximum current per terminal:	24A
Category of use:	-
Rated voltage:	690V
Dimensions:	122x120x90mm

8xWDU 4,0mm² (bridged 2/2) + 2WPE - 4xM20



code: 644.0345-J02

TECHNICAL CHARACTERISTICS	
Ex Protection type:	Ex eb IIC T6 Gb Ex tb IIIC T80°C Db - IP66
Operating temperature range:	-30°C ≤Ta ≤+40°C
Maximum current per terminal:	20A
Category of use:	-
Rated voltage:	690V
Dimensions:	122x120x90mm

4xWDU + 1WPE 6,0mm² - 3xM20



code: 644.0345-J03

TECHNICAL CHARACTERISTICS	
Ex Protection type:	Ex eb IIC T6 Gb Ex tb IIIC T80°C Db - IP66
Operating temperature range:	-30°C ≤Ta ≤+40°C
Maximum current per terminal:	30A
Category of use:	-
Rated voltage:	550V
Dimensions:	122x120x90mm

8xWDU 6,0mm² (bridged 2/2) + 2WPE - 3xM20



code: 644.0345-J04

TECHNICAL CHARACTERISTICS	
Ex Protection type:	Ex eb IIC T6 Gb Ex tb IIIC T80°C Db - IP66
Operating temperature range:	-30°C ≤Ta ≤+40°C
Maximum current per terminal:	25A
Category of use:	-
Rated voltage:	550V
Dimensions:	122x120x90mm

10x2,5mm² CAGE TERMINAL - 4xM20 (plugged)



code: 644.0210-J10

TECHNICAL CHARACTERISTICS	
Ex Protection type:	Ex eb IIC T6 Gb Ex tb IIIC T80°C Db - IP66
Operating temperature range:	-30°C ≤Ta ≤+40°C
Maximum current per terminal:	12A
Category of use:	-
Rated voltage:	690V
Dimensions:	75x110x75mm

14x2,5mm² CAGE TERMINAL - 6xM20 (plugged)

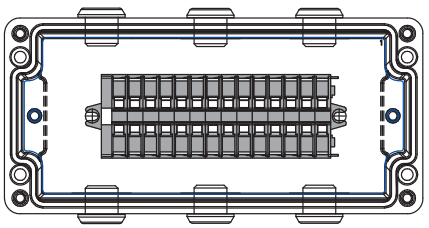

code: 644.0220-J14

TECHNICAL CHARACTERISTICS	
Ex Protection type:	Ex eb IIC T6 Gb Ex tb IIIC T80°C Db - IP66
Operating temperature range:	-30°C ≤Ta ≤+40°C
Maximum current per terminal:	12A
Category of use:	-
Rated voltage:	690V
Dimensions:	75x160x75mm

20x2,5mm² CAGE TERMINAL - 8xM20 (plugged)

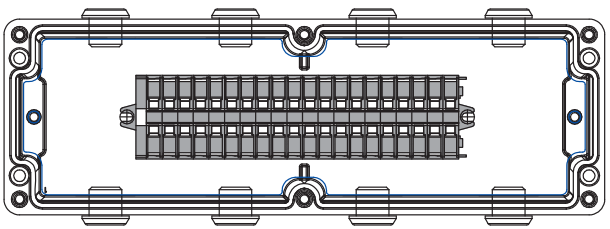

code: 644.0240-J20

TECHNICAL CHARACTERISTICS	
Ex Protection type:	Ex eb IIC T6 Gb Ex tb IIIC T80°C Db - IP66
Operating temperature range:	-30°C ≤Ta ≤+40°C
Maximum current per terminal:	11A
Category of use:	-
Rated voltage:	690V
Dimensions:	75x230x75mm