

PUSH-IN CAGE CLAMP®

Through and Ground Conductor Terminal Block TOPJOB® S; with Lever and Push-in CAGE CLAMP® 2.5 (4) mm²; 2102 Series

1


Technical Data

0.25 ... 2.5 (4) mm² ① | 22 ... 12 AWG

800 V/8 kV/3 ②

I_N 24 A (32 A)

Terminal block width: 5.2 mm / 0.205 inch

 10 ... 12 mm / 0.39 ... 0.47 inch


Technical Data

0.25 ... 2.5 (4) mm² ① | 22 ... 12 AWG

800 V/8 kV/3 ②

I_N 24 A (30 A)

Terminal block width: 5.2 mm / 0.205 inch

 10 ... 12 mm / 0.39 ... 0.47 inch



① Conductor range: 0.25 ... 4 mm² "s+f-st"; Push-in termination: 1 ... 4 mm² "s" and 1 ... 2.5 mm² "insulated ferrules, 12 mm" Depending on the conductor characteristic, a conductor with a smaller cross section can also be inserted via push-in termination.

② 800 V = rated voltage
8 kV = rated impulse voltage
3 = pollution degree (see Section 14)

③ Terminal blocks with a blue insulated housing are suitable for Ex i applications.

Please observe the application notes:
Jumpers, from page 152
Testing accessories, from page 146
Marking, from page 588

Approvals and corresponding ratings, visit www.wago.com



2-conductor through terminal block; with lever and Push-in CAGE CLAMP®

Color	Item No.	Pack. Unit
gray	2102-1201	50
blue	2102-1204 ③	50

3-conductor through terminal block; with lever and Push-in CAGE CLAMP®

Color	Item No.	Pack. Unit
gray	2102-1301	50
blue	2102-1304 ③	50

2-conductor ground terminal block; with lever and Push-in CAGE CLAMP®

green-yellow	2102-1207	50
--------------	-----------	----

3-conductor ground terminal block; with lever and Push-in CAGE CLAMP®

green-yellow	2102-1307	50
--------------	-----------	----

Accessories; item-specific

End and intermediate plate; 0.8 mm thick

orange	2102-1292	100 (25)
gray	2102-1291	100 (25)

Accessories; item-specific

End and intermediate plate; 0.8 mm thick

orange	2102-1392	100 (25)
gray	2102-1391	100 (25)

Accessories; 2102 Series Appropriate marking systems: WMB/WMB Inline/Marking strips

Insulation stop; 5 pcs/strip; 0.25 ... 0.5 mm²

light gray	2002-171	200 (25)
------------	----------	----------

Insulation stop; 5 pcs/strip; 0.75 ... 1 mm²

dark gray	2002-172	200 (25)
-----------	----------	----------

Protective warning marker; with black high-voltage symbol; for 5 terminal blocks

yellow	2002-115	100 (25)
--------	----------	----------

Push-in type jumper bar; insulated; I_N 25 A; light gray

2-way	2002-402	25
3-way	2002-403	25
4-way	2002-404	25
5-way	2002-405	25
6-way	2002-406	25
7-way	2002-407	25
8-way	2002-408	25
9-way	2002-409	25
10-way	2002-410	25

Delta jumper; insulated; I_N = I_N terminal block; light gray

1-2 3-4 5-6	2002-406/020-000	25
-------------	------------------	----

Star point jumper; insulated; I_N = I_N terminal block; light gray

1-3-5	2002-405/011-000	25
-------	------------------	----

Push-in type jumper bar; insulated; I_N 25 A; light gray

1 to 3	2002-433	25
1 to 4	2002-434	25
1 to 5	2002-435	25
1 to 6	2002-436	25
1 to 7	2002-437	25
1 to 8	2002-438	25
1 to 9	2002-439	25
1 to 10	2002-440	25

Adjacent jumper for continuous commoning; insulated; I_N 25 A; light gray

2-way	2002-400	25
-------	----------	----

Adjacent jumper for continuous commoning; insulated; I_N 25 A; 1 to 3

light gray	2002-423	25
red	2002-423/000-005	25
blue	2002-423/000-006	25

Adjacent jumper for continuous commoning; insulated; I_N 25 A; light gray

5-way	2002-415	25
-------	----------	----

Push-in type wire jumper; insulated; 1.5 mm² conductor cross-section; I_N 18 A

L = 60 mm	2009-412	100 (10)
L = 110 mm	2009-414	100 (10)
L = 250 mm	2009-416	100 (10)

Accessories; 2102 Series

Appropriate marking systems:
WMB/WMB Inline/Marking strips

Staggered jumper; insulated; I_N 25 A; light gray

2-way	2002-472	25
3-way	2002-473	25
4-way	2002-474	25
5-way	2002-475	25
6-way	2002-476	25
7-way	2002-477	25
8-way	2002-478	25
9-way	2002-479	25
10-way	2002-480	25
11-way	2002-481	25
12-way	2002-482	25

Customized staggered jumper; insulated; with contact lugs broken off at the factory and circuit printing; I_N 25 A; light gray

1-3	2002-473/011-000	25
1-3-5	2002-475/011-000	25
1-3-5-7	2002-477/011-000	25
1-3-5-7-9	2002-479/011-000	25
1-3-5-7-9-11	2002-481/011-000	25

Modular connector; snaps together; for jumper contact slot

gray	2002-511	100 (25)
------	----------	----------

L-type test plug module; snaps together

gray	2002-611	100 (25)
------	----------	----------

WMB Inline, plain; 1,500 WMB markers (5 mm)/reel; 5 ... 5.2 mm stretchable

white	2009-115	1
-------	----------	---

Marking strip; plain; 11 mm wide; 50 m reel

white	2009-110	1
-------	----------	---


WMB marking card; white; 10 strips with 10 markers/card; 5 ... 5.2 mm stretchable

plain	793-5501	5
-------	----------	---


Through and Ground Conductor Terminal Block TOPJOB® S; with Lever and Push-in CAGE CLAMP®


6 (10) mm²; 2106 Series

Technical Data

0.5 ... 6 (10) mm² ① | 20 ... 8 AWG
 800 V/8 kV/3 ②
 I_N 41 A (55 A)
 Terminal block width: 7.5 mm / 0.295 inch
 13 ... 15 mm / 0.51 ... 0.59 inch

Technical Data

0.5 ... 6 (10) mm² ① | 20 ... 8 AWG
 800 V/8 kV/3 ②
 I_N 41 A (55 A)
 Terminal block width: 7.5 mm / 0.295 inch
 13 ... 15 mm / 0.51 ... 0.59 inch

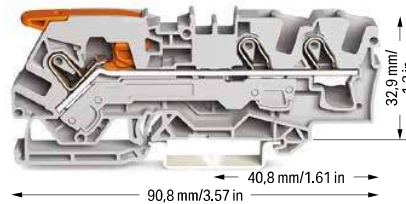

2-conductor through terminal block; with lever and Push-in CAGE CLAMP®

Color	Item No.	Pack. Unit
○ gray	2106-1201	25
● blue	2106-1204 ③	25

3-conductor through terminal block; with lever and Push-in CAGE CLAMP®

Color	Item No.	Pack. Unit
○ gray	2106-1301	25
● blue	2106-1304 ③	25

2-conductor ground terminal block; with lever and Push-in CAGE CLAMP®

● green-yellow	2106-1207	25
----------------	-----------	----

3-conductor ground terminal block; with lever and Push-in CAGE CLAMP®

● green-yellow	2106-1307	25
----------------	-----------	----

Accessories; item-specific

End and intermediate plate; 1 mm thick

 orange	2106-1292	100 (25)
 gray	2106-1291	100 (25)

Accessories; item-specific

End and intermediate plate; 1 mm thick

 orange	2106-1392	100 (25)
 gray	2106-1391	100 (25)

Accessories; 2106 Series

Appropriate marking systems: WMB/WMB Inline/Marking strips

Push-in type jumper bar; insulated; I_N 41 A; light gray

 2-way	2006-402	25
 3-way	2006-403	25
 4-way	2006-404	25
 5-way	2006-405	25

Push-in type jumper bar; insulated; I_N 41 A; light gray

 1 to 3	2006-433	25
 1 to 4	2006-434	25
 1 to 5	2006-435	25

Star point jumper; insulated; I_N = I_N terminal block; light gray

 1-3-5	2006-405/011-000	25
---	------------------	----

Protective warning marker; with black high-voltage symbol; for 5 terminal blocks

 yellow	2006-115	100 (25)
--	----------	----------

Lockout cap; for conductor entry and operating slot

 gray	2006-191	25
--	----------	----

Modular connector; snaps together; for jumper contact slot

 gray	2006-511	50 (25)
--	----------	---------

Test plug adapter; for 4 mm Ø test plug

 gray	2009-174	100 (25)
--	----------	----------

Marking strip; plain; 11 mm wide; 50 m reel

 white	2009-110	1
---	----------	---

WMB marking card; white; 10 strips with 10 markers/card; 5 ... 5.2 mm stretchable

 plain	793-5501	5
---	----------	---

① Conductor range: 0.5 ... 10 mm² "s+f-st";
 Push-in termination: 2.5 ... 10 mm² "s" and
 2.5 ... 6 mm² "insulated ferrules; 12 mm"
 Depending on the conductor characteristic, a conductor
 with a smaller cross section can also be inserted
 via push-in termination.

② 800 V = rated voltage
 8 kV = rated impulse voltage
 3 = pollution degree
 (see Section 14)

③ Terminal blocks with a blue insulated housing are
 suitable for Ex i applications.

Please observe the application notes:
 Jumpers, from page 155
 Testing accessories, from page 148
 Marking, from page 588


Approvals and corresponding ratings,
 visit www.wago.com

PUSH-IN CAGE CLAMP®

Through and Ground Conductor Terminal Block TOPJOB® S; with Lever and Push-in CAGE CLAMP® 16 (25 "f-st") mm²; 2102 Series

1

Technical Data	
0.5 ... 16 (25 "f-st") mm² ①	20 ... 4 AWG
800 V/8 kV/3 ②	
I _N 76 A (90 A)	
Terminal block width: 12 mm / 0.472 inch	
18 ... 20 mm / 0.71 ... 0.79 inch	



2-conductor through terminal block; with lever and Push-in CAGE CLAMP®		
Color	Item No.	Pack. Unit
gray	2116-1201	20
blue	2116-1204 ③	20

2-conductor ground terminal block; with lever and Push-in CAGE CLAMP®		
15 mm high DIN-35 rails shall be used for a current load higher than 76 A!		
Color	Item No.	Pack. Unit
green-yellow	2116-1207	20

Accessories; item-specific			
End and intermediate plate; 1 mm thick			
orange	2116-1292	100 (25)	
gray	2116-1291	100 (25)	

Technical Data	
0.5 ... 16 (25 "f-st") mm² ①	20 ... 4 AWG
800 V/8 kV/3 ②	
I _N 76 A (90 A)	
Terminal block width: 12 mm / 0.472 inch	
18 ... 20 mm / 0.71 ... 0.79 inch	



3-conductor through terminal block; with lever and Push-in CAGE CLAMP®		
Color	Item No.	Pack. Unit
gray	2116-1301	20
blue	2116-1304 ③	20

3-conductor ground terminal block; with lever and Push-in CAGE CLAMP®		
15 mm high DIN-35 rails shall be used for a current load higher than 76 A!		
Color	Item No.	Pack. Unit
green-yellow	2116-1307	20

Accessories; item-specific			
End and intermediate plate; 1 mm thick			
orange	2116-1392	100 (25)	
gray	2116-1391	100 (25)	

Accessories; 2116 Series
Appropriate marking systems: WMB/WMB Inline/Marking strips

Push-in type jumper bar; insulated; I _N 41 A; light gray			
2-way	2016-402	25	
3-way	2016-403	25	
4-way	2016-404	25	
5-way	2016-405	25	

Push-in type jumper bar; insulated; I _N 41 A; light gray			
1 to 3	2016-433	25	
1 to 4	2016-434	25	
1 to 5	2016-435	25	

Star point jumper; insulated; I _N = I _N terminal block; light gray			
1-3-5	2016-405/011-000	25	

Protective warning marker; with black high-voltage symbol; for 5 terminal blocks			
yellow	2016-115	100 (25)	

Finger guard; touch-proof cover protects unused conductor entries			
yellow	2016-100	100 (25)	

Modular connector; snaps together; for jumper contact slot			
gray	2016-511	50 (25)	

Test plug adapter; for 4 mm Ø test plug			
gray	2009-174	100 (25)	

Marking strip; plain; 11 mm wide; 50 m reel			
white	2009-110	1	

WMB marking card; white; 10 strips with 10 markers/card; 5 ... 5.2 mm stretchable			
plain	793-5501	5	

① Conductor range: 0.5 ... 16 mm² "s+f-st", 25 mm² "f-st"; Push-in termination: 6 ... 16 mm² "s" and 6 ... 16 mm² "insulated ferrules; 18 mm"
Depending on the conductor characteristic, a conductor with a smaller cross section can also be inserted via push-in termination.


② 800 V = rated voltage
8 kV = rated impulse voltage
3 = pollution degree (see Section 14)


③ Terminal blocks with a blue insulated housing are suitable for Ex i applications.



Please observe the application notes:
Jumpers, from page 155
Testing accessories, from page 149
Marking, from page 588

Approvals and corresponding ratings, visit www.wago.com

Through and Ground Conductor Terminal Block TOPJOB® S; with Lever and Push-Button 2.5 (4) mm²; 2102 Series

Technical Data	
0.25 ... 2.5 (4) mm ² ①	22 ... 12 AWG
800 V/8 kV/3 ②	
I _N 24 A (32 A)	
Terminal block width: 5.2 mm / 0.205 inch	
 10 ... 12 mm / 0.39 ... 0.47 inch	

Technical Data	
0.25 ... 2.5 (4) mm ² ①	22 ... 12 AWG
800 V/8 kV/3 ②	
I _N 24 A (30 A)	
Terminal block width: 5.2 mm / 0.205 inch	
 10 ... 12 mm / 0.39 ... 0.47 inch	







2-conductor through terminal block; with lever and push-button		
Color	Item No.	Pack. Unit
○ gray	2102-5201	50
● blue	2102-5204 ③	50

3-conductor through terminal block; with lever and push-button		
Color	Item No.	Pack. Unit
○ gray	2102-5301	50
● blue	2102-5304 ③	50


2-conductor ground terminal block; with lever and push-button		
Color	Item No.	Pack. Unit
● green-yellow	2102-5207	50

3-conductor ground terminal block; with lever and push-button		
Color	Item No.	Pack. Unit
● green-yellow	2102-5307	50


Accessories; item-specific			
End and intermediate plate; 0.8 mm thick			
 orange	2102-1292	100 (25)	
 gray	2102-1291	100 (25)	

Accessories; item-specific			
End and intermediate plate; 0.8 mm thick			
 orange	2102-1392	100 (25)	
 gray	2102-1391	100 (25)	

Accessories; 2102 Series
Appropriate marking systems: WMB/WMB Inline/Marking strips

Insulation stop; 5 pcs/strip; 0.25 ... 0.5 mm ²		
Color	Item No.	Pack. Unit
 light gray	2002-171	200 (25)

Adjacent jumper for continuous commoning; insulated; I _N 25 A, light gray		
Configuration	Item No.	Pack. Unit
2-way	2002-400	25

Insulation stop; 5 pcs/strip; 0.75 ... 1 mm ²		
Color	Item No.	Pack. Unit
 dark gray	2002-172	200 (25)

Adjacent jumper for continuous commoning; insulated; I _N 25 A; 1 to 3		
Configuration	Item No.	Pack. Unit
light gray	2002-423	25
red	2002-423/000-005	25
blue	2002-423/000-006	25

Push-in type jumper bar; insulated; I _N 25 A; light gray		
Configuration	Item No.	Pack. Unit
2-way	2002-402	25
3-way	2002-403	25
4-way	2002-404	25
5-way	2002-405	25
6-way	2002-406	25
7-way	2002-407	25
8-way	2002-408	25
9-way	2002-409	25
10-way	2002-410	25

Adjacent jumper for continuous commoning; insulated; I _N 25 A, light gray		
Configuration	Item No.	Pack. Unit
5-way	2002-415	25

Push-in type jumper bar; insulated; I _N 25 A; light gray		
Configuration	Item No.	Pack. Unit
1 to 3	2002-433	25
1 to 4	2002-434	25
1 to 5	2002-435	25
1 to 6	2002-436	25
1 to 7	2002-437	25
1 to 8	2002-438	25
1 to 9	2002-439	25
1 to 10	2002-440	25

Push-in type wire jumper; insulated; 1.5 mm ² conductor cross-section; I _N 18 A		
Length	Item No.	Pack. Unit
L = 60 mm	2009-412	100 (10)
L = 110 mm	2009-414	100 (10)
L = 250 mm	2009-416	100 (10)

Delta jumper; insulated; I _N = I _N terminal block; light gray		
Configuration	Item No.	Pack. Unit
1-2 3-4 5-6	2002-406/020-000	25

Staggered jumper; insulated; I _N 25 A; light gray		
Configuration	Item No.	Pack. Unit
2-way	2002-472	25
3-way	2002-473	25
4-way	2002-474	25
5-way	2002-475	25
6-way	2002-476	25
7-way	2002-477	25
8-way	2002-478	25
9-way	2002-479	25
10-way	2002-480	25
11-way	2002-481	25
12-way	2002-482	25






- Conductor range: 0.25 ... 4 mm² "s+f-st"; Push-in termination: 1 ... 4 mm² "s" and 1 ... 2.5 mm² "insulated ferrules, 12 mm" Depending on the conductor characteristic, a conductor with a smaller cross section can also be inserted via push-in termination.
- 800 V = rated voltage
8 kV = rated impulse voltage
3 = pollution degree (see Section 14)

Terminal blocks with a blue insulated housing are suitable for Ex i applications.

Please observe the application notes:
Jumpers, from page 152
Testing accessories, from page 146
Marking, from page 588

Approvals and corresponding ratings, visit www.wago.com

Accessories; 2102 Series
Appropriate marking systems:
WMB/WMB Inline/Marking strips

Customized staggered jumper; insulated; with contact lugs broken off at the factory and circuit printing; I _N 25 A; light gray			
Configuration	Item No.	Pack. Unit	
1-3	2002-473/011-000	25	
1-3-5	2002-475/011-000	25	
1-3-5-7	2002-477/011-000	25	
1-3-5-7-9	2002-479/011-000	25	
1-3-5-7-9-11	2002-481/011-000	25	

Star point jumper; insulated; I _N = I _N terminal block; light gray		
Configuration	Item No.	Pack. Unit
1-3-5	2002-405/011-000	25

Modular connector; snaps together; for jumper contact slot		
Color	Item No.	Pack. Unit
gray	2002-511	100 (25)

Spacer module; snaps together; bridges commoned terminal blocks		
Color	Item No.	Pack. Unit
gray	2002-549	100 (25)


End plate; for modular connector; 1.5 mm thick		
Color	Item No.	Pack. Unit
gray	2002-541	100 (25)


WMB Inline, plain; 1,500 WMB markers (5 mm)/reel; 5 ... 5.2 mm stretchable		
Color	Item No.	Pack. Unit
white	2009-115	1



Marking strip; plain; 11 mm wide; 50 m reel		
Color	Item No.	Pack. Unit
white	2009-110	1

Through and Ground Conductor Terminal Block TOPJOB® S; with Lever and Push-Button 6 (10) mm²; 2106 Series

1

Technical Data	
0.5 ... 6 (10) mm ² ❶	20 ... 8 AWG
800 V/8 kV/3 ❷	
I _N 41 A (55 A)	
Terminal block width: 7.5 mm / 0.295 inch	
 13 ... 15 mm / 0.51 ... 0.59 inch	

Technical Data	
0.5 ... 6 (10) mm ² ❶	20 ... 8 AWG
800 V/8 kV/3 ❷	
I _N 41 A (55 A)	
Terminal block width: 7.5 mm / 0.295 inch	
 13 ... 15 mm / 0.51 ... 0.59 inch	

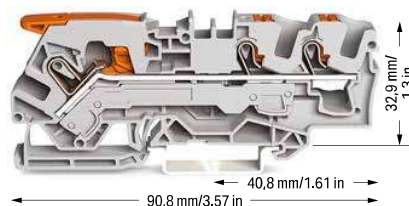

2-conductor through terminal block; with lever and push-button

Color	Item No.	Pack. Unit
gray	2106-5201	25
blue	2106-5204 ❸	25

3-conductor through terminal block; with lever and push-button

Color	Item No.	Pack. Unit
gray	2106-5301	25
blue	2106-5304 ❸	25



2-conductor ground terminal block; with lever and push-button

green-yellow	2106-5207	25
--------------	-----------	----



3-conductor ground terminal block; with lever and push-button

green-yellow	2106-5307	25
--------------	-----------	----

Accessories; item-specific

End and intermediate plate; 1 mm thick			
	orange	2106-1292	100 (25)
	gray	2106-1291	100 (25)

Accessories; item-specific

End and intermediate plate; 1 mm thick			
	orange	2106-1392	100 (25)
	gray	2106-1391	100 (25)

Accessories; 2106 Series

Appropriate marking systems: WMB/WMB Inline/Marking strips

Push-in type jumper bar; insulated; I_N 41 A; light gray

	2-way	2006-402	25
	3-way	2006-403	25
	4-way	2006-404	25
	5-way	2006-405	25

Lockout cap; for conductor entry and operating slot

	gray	2006-191	25
---	------	----------	----


Push-in type jumper bar; insulated; I_N 41 A; light gray

	1 to 3	2006-433	25
	1 to 4	2006-434	25
	1 to 5	2006-435	25

Modular connector; snaps together; for jumper contact slot

	gray	2006-511	50 (25)
---	------	----------	---------

Star point jumper; insulated; I_N = I_N terminal block; light gray

	1-3-5	2006-405/011-000	25
---	-------	------------------	----

Test plug adapter; for 4 mm Ø test plug

	gray	2009-174	100 (25)
---	------	----------	----------

Marking strip; plain; 11 mm wide; 50 m reel

	white	2009-110	1
---	-------	----------	---

WMB marking card; white; 10 strips with 10 markers/card; 5 ... 5.2 mm stretchable

	plain	793-5501	5
---	-------	----------	---

❶ Conductor range: 0.5 ... 10 mm² "s+f-st"; Push-in termination: 2.5 ... 10 mm² "s" and 2.5 ... 6 mm² "insulated ferrules; 12 mm" Depending on the conductor characteristic, a conductor with a smaller cross section can also be inserted via push-in termination.

❷ 800 V = rated voltage
8 kV = rated impulse voltage
3 = pollution degree (see Section 14)

❸ Terminal blocks with a blue insulated housing are suitable for Ex i applications.

Please observe the application notes:
Jumpers, from page 155
Testing accessories, from page 148
Marking, from page 588

Approvals and corresponding ratings, visit www.wago.com

Through and Ground Conductor Terminal Block TOPJOB® S; with Lever and Push-Button 16 (25 "f-st") mm²; 2102 Series

Technical Data

0.5 ... 16 (25 "f-st") mm² ① | 20 ... 4 AWG

800 V/8 kV/3 ②

I_N 76 A (90 A)

Terminal block width: 12 mm / 0.472 inch


 18 ... 20 mm / 0.71 ... 0.79 inch



Technical Data

0.5 ... 16 (25 "f-st") mm² ① | 20 ... 4 AWG

800 V/8 kV/3 ②

I_N 76 A (90 A)

Terminal block width: 12 mm / 0.472 inch


 18 ... 20 mm / 0.71 ... 0.79 inch


2-conductor through terminal block; with lever and push-button



Color	Item No.	Pack. Unit
○ gray	2116-5201	20
● blue	2116-5204 ③	20

2-conductor ground terminal block; with lever and push-button
15 mm high DIN-35 rails shall be used for a current load higher than 76 A!

● green-yellow	2116-5207	20
----------------	-----------	----

Accessories; item-specific

End and intermediate plate; 1 mm thick

	orange	2116-1292	100 (25)
	gray	2116-1291	100 (25)



3-conductor through terminal block; with lever and push-button



Color	Item No.	Pack. Unit
○ gray	2116-5301	20
● blue	2116-5304 ③	20

3-conductor ground terminal block; with lever and push-button
15 mm high DIN-35 rails shall be used for a current load higher than 76 A!

● green-yellow	2116-5307	20
----------------	-----------	----

Accessories; item-specific

End and intermediate plate; 1 mm thick

	orange	2116-1392	100 (25)
	gray	2116-1391	100 (25)

Accessories; 2116 Series

Appropriate marking systems: WMB/WMB Inline/Marking strips

Push-in type jumper bar; insulated; I_N 41 A; light gray

	2-way	2016-402	25
	3-way	2016-403	25
	4-way	2016-404	25
	5-way	2016-405	25

Push-in type jumper bar; insulated; I_N 41 A; light gray

	1 to 3	2016-433	25
	1 to 4	2016-434	25
	1 to 5	2016-435	25

Star point jumper; insulated; I_N = I_N terminal block; light gray

	1-3-5	2016-405/011-000	25
---	-------	------------------	----

Finger guard; touch-proof cover protects unused conductor entries

	yellow	2016-100	100 (25)
---	--------	----------	----------

Modular connector; snaps together; for jumper contact slot

	gray	2016-511	50 (25)
---	------	----------	---------

Test plug adapter; for 4 mm Ø test plug

	gray	2009-174	100 (25)
---	------	----------	----------

Marking strip; plain; 11 mm wide; 50 m reel

	white	2009-110	1
---	-------	----------	---

WMB marking card; white; 10 strips with 10 markers/card; 5 ... 5.2 mm stretchable

	plain	793-5501	5
---	-------	----------	---

① Conductor range: 0.5 ... 16 mm² "s+f-st", 25 mm² "f-st"; Push-in termination: 6 ... 16 mm² "s" and 6 ... 16 mm² "insulated ferrules; 18 mm"
Depending on the conductor characteristic, a conductor with a smaller cross section can also be inserted via push-in termination.

② 800 V = rated voltage
8 kV = rated impulse voltage
3 = pollution degree
(see Section 14)

③ Terminal blocks with a blue insulated housing are suitable for Ex i applications.

Please observe the application notes:
Jumpers, from page 155
Testing accessories, from page 149
Marking, from page 588

Approvals and corresponding ratings,
visit www.wago.com

1